


# PIN RECEPTACLES

FOR .040" - .050" DIAMETER PINS

## 0355

0355-0-15-XX-02-XX-10-0


Solder mount in .102 min. mounting hole



## 0354

0354-0-15-XX-02-XX-10-0


Pentagonal press-fit in .104 min. plated through-hole



## 3490

3490-0-15-XX-02-XX-10-0


Press-fit in .091 mounting hole



## 3808

3808-0-15-XX-02-XX-10-0


Press-fit in .090 mounting hole

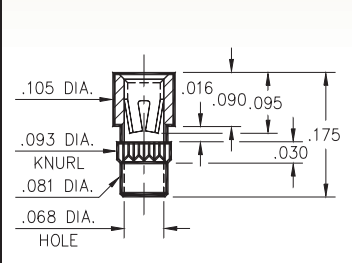

## 9184

9184-0-15-XX-02-XX-40-0


Bottom entry, surface mount  
.092 min. plated through-hole  
Also available on carrier tape,  
Order as: 9184-0-57-XX-02-XX-40-0




## 9222

9222-2-15-XX-02-XX-40-0

Bottom entry, surface mount  
.082 min. plated through-hole  
Also available on carrier tape,  
Order as: 9222-2-57-XX-02-XX-40-0



Carrier tape format for  
9184 and 9222.  
1,500 pieces per 13" reel



### SPECIFICATIONS:

**Shell Material:** Brass Alloy 360, 1/2 Hard

**Contact Material:** Beryllium Copper Alloy 172, HT

**Dimensions:** Inches

**Tolerances On:** Lengths:  $\pm .005$

Diameters:  $\pm .002$

Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - X - 15 - XX - 02 - XX - XX - 0

**BASIC PART #**

**SPECIFY SHELL FINISH:**

01 200  $\mu$ " TIN/LEAD OVER NICKEL

◆ 80 200  $\mu$ " TIN OVER NICKEL (RoHS)

◆ 15 10  $\mu$ " GOLD OVER NICKEL (RoHS)

**SPECIFY CONTACT FINISH:**

01 200  $\mu$ " TIN/LEAD OVER NICKEL

◆ 80 200  $\mu$ " TIN OVER NICKEL (RoHS)

◆ 27 30  $\mu$ " GOLD OVER NICKEL (RoHS)

**SELECT CONTACT:**

#02 CONTACT (DATA ON PAGE 259)

(For alternate contact choices, see group F on page 248)



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Mill-Max:

[0355-0-15-80-02-80-10-0](#) [0355-0-15-80-02-27-10-0](#) [0355-0-15-15-02-27-10-0](#) [0354-0-15-15-02-27-10-0](#) [0355-0-15-01-02-27-10-0](#) [0355-0-15-01-02-01-10-0](#) [0354-0-15-01-02-27-10-0](#) [3808-0-15-15-02-14-10-0](#) [0354-0-15-01-02-01-10-0](#) [3808-0-15-15-02-27-10-0](#) [9225-0-15-00-00-00-10-0](#) [0355-0-15-00-00-00-10-0](#) [3490-0-15-00-00-00-10-0](#) [0354-0-15-00-00-00-10-0](#) [3808-0-15-01-02-14-10-0](#) [3490-0-15-01-02-14-10-0](#) [3808-0-15-80-02-14-10-0](#) [0355-0-15-80-02-14-10-0](#) [3490-0-15-80-02-14-10-0](#) [0354-0-15-80-02-14-10-0](#) [0354-0-15-01-02-14-10-0](#) [0354-0-15-15-02-14-10-0](#) [0355-0-15-15-02-14-10-0](#)