


# PIN RECEPTACLES

FOR .015" - .025" DIAMETER PINS

## 8964

8964-0-15-XX-30-XX-04-0


Press-fit in .057 mounting hole



## 5342

5342-0-15-XX-35-XX-10-0


Solder mount in .051 min. mounting hole  
Also available on 8mm wide carrier tape:  
6,000 parts per 13" reel  
Order as: 5342-0-57-XX-35-XX-10-0



## 8857

8857-X-15-XX-32-XX-04-0

Press-fit in .057 mounting hole

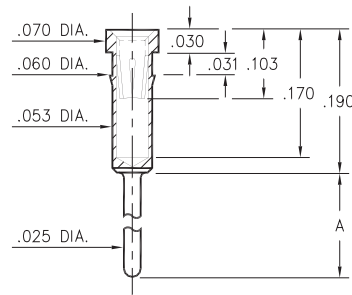


Basic Part Number	Length A
8857-0	.311
8857-1	.448
8857-2	.589
8857-3	.731
8857-4	.871

## 8862/8877

88XX-0-15-XX-30-XX-04-0

Press-fit in .056 mounting hole




Basic Part Number	Length A
8862-0	.300
8877-0	.350

## 1334

1334-0-15-XX-30-XX-04-0


Press-fit in .057 mounting hole



## 8855

8855-0-15-XX-30-XX-34-0


Press-fit in .057 mounting hole

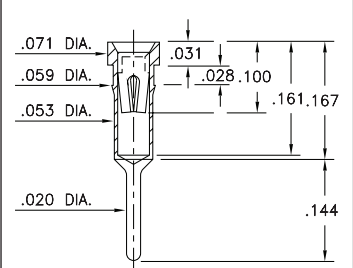

## 2954

2954-0-18-XX-30-XX-10-0


Press-fit in .057 mounting hole  
Accepts wire sizes up to .028" dia.



## 9363

9363-0-15-XX-35-XX-10-0


Solder mount in .057 min. mounting hole



## 1023

1023-0-15-XX-30-XX-04-0


Press-fit in .061 mounting hole



## 1701

1701-0-15-XX-30-XX-10-0

Press-fit in .057 mounting hole



### SPECIFICATIONS:

**Shell Material:** Brass Alloy 360, 1/2 Hard

**Contact Material:** Beryllium Copper Alloy 172, HT

**Dimensions:** Inches

**Tolerances On:** Lengths: ±.005

Diameters: ±.002

Angles: ± 2°



**ORDER CODE:** XXXX - X - 1X - XX - XX - XX - 10 - 0

**BASIC PART #**

**SPECIFY SHELL FINISH:**

- 01 200 μ" TIN/LEAD OVER NICKEL
- ◆ 80 200 μ" TIN OVER NICKEL (RoHS)
- ◆ 15 10 μ" GOLD OVER NICKEL (RoHS)

**SPECIFY CONTACT FINISH:**

- 02 100 μ" TIN/LEAD OVER NICKEL
- ◆ 84 100 μ" TIN OVER NICKEL (RoHS)
- ◆ 27 30 μ" GOLD OVER NICKEL (RoHS)

**SELECT CONTACT:**

**#30, #32 or #35 CONTACT (DATA ON PAGE 253 & 254)**  
(For alternate contact choices, see groups B and C on page 248)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Mill-Max:

[5342-0-15-80-35-84-10-0](#) [5342-0-15-15-35-27-10-0](#) [9363-0-15-15-35-27-10-0](#) [8857-1-15-00-00-00-04-0](#) [9363-0-15-00-00-00-10-0](#) [8862-0-15-00-00-00-04-0](#) [1023-0-15-00-00-00-03-0](#) [8857-0-15-00-00-00-04-0](#) [1701-0-15-84-30-27-10-0](#) [8857-2-15-00-00-00-04-0](#) [2954-0-18-00-00-00-10-0](#) [8857-3-15-00-00-00-04-0](#) [8877-0-15-00-00-00-04-0](#) [5342-0-15-00-00-00-10-0](#) [1701-0-15-00-00-00-09-0](#) [8857-4-15-00-00-00-04-0](#)