
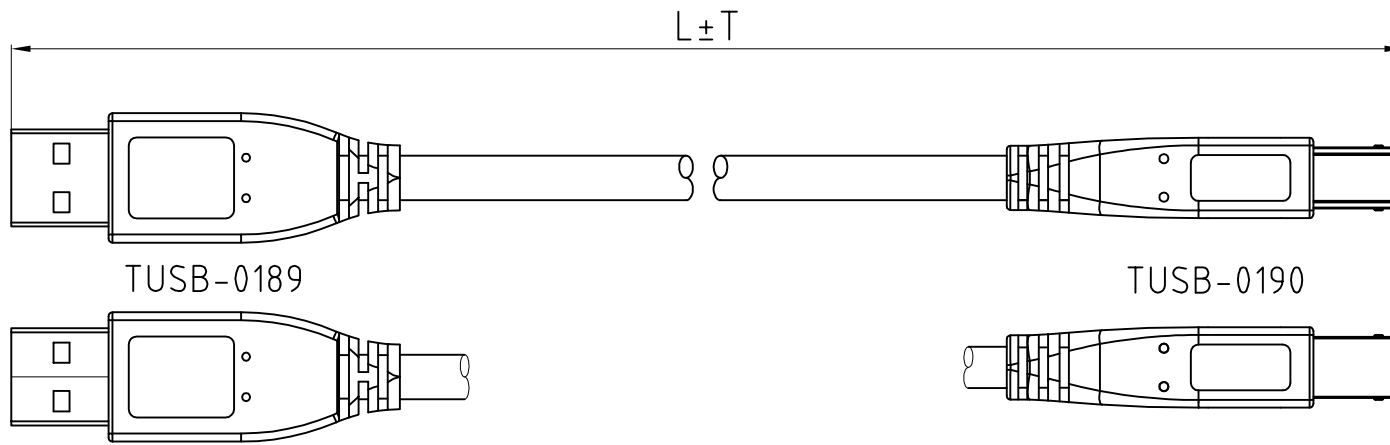



# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△	B	ECR # 090616-6 ADD BAR CODE NO.	06/16/09'

USB 3.0 A/M 9PIN  
INS:BLUE(P.T 300C)



USB 3.0 B/M 9PIN  
INS:BLACK



**NOTE:**

1.CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)+AL/MY +Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin + #28(7/0.127 T.C)×2C INS:Polyolefin + AL/MY + B.D(85%) PVC JACKET; OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.

**2.CONNECTOR:**

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.

P2 :USB 3.0 B TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).

**4.ELECTRICAL TEST:**

(1)100% OPEN SHORT & MIS WIRE TEST.

(2)CONTACT RESISTANCE 3 ohm Max .

(3)INSULATION RESISTANCE 10M ohm Min .

(4)HI-POT DC300V

5.PACKING: EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL.

PIN OUT			
P1		P2	
1	RED	1	PWR
2	WHITE	2	UTP_D-
3	GREEN	3	UTP_D+
4	BLACK	4	GND_PWRrt
5	BLUE	5	SDP1-
6	YELLOW	6	SDP1+
7	D.W	7	SDP1_Drain & SDP2_Drain
8	PURPLE	8	SDP2-
9	ORANGE	9	SDP2+
SHELL	B.D	SHELL	

Tolerance Inch M/M		
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
Draw FANNIE 06/16/09'		

**Rotronic co., LTD.**

Title  
USB 3.0 A/M - B/M CABLE

Customer P/N

App'd Customer: T-RAG

Scale NONE Units M/M Third Angle Projection

Dwg No. 170-3591 REV:B Sheet.1/1

170-3591-2	11.02.8871	3000	30	BIG HEADER CARD	50	7611990188307
170-3591-1	11.02.8870	1800	30	SMALL HEADER CARD	50	7611990188291
DWG	P/N	L(mm)	T(mm)	HEADER CARD	PCS/CARTON	BAR CODE NO.