

## HC-HV 10/16-SML-67/M1PG21

Order No.: 1774063


The illustration shows box mounting bases in the versions with double locking latch and single locking latch, for double locking latch with protective cover



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1774063>

Box mounting base, with single locking latch, height 67 mm, with screw connection, 1x Pg21

### Commercial data

GTIN (EAN)	 4 017918 115388
Note	Made-to-order
sales group	D003
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 249 (PC-2005)

### Product notes

WEEE/RoHS-compliant since:  
01/31/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Note	For contact inserts HC-HV10/16
Design	HV10/16
Height	67 mm

Width	57 mm
Length	144 mm
Housing type	Box mounting bases
Locking type	With single locking latch
Cable exit	Conductor exit direction to the left (looking into the open single locking latch)
Pg screw connection	With
Type of the screw connection	1x Pg21
Wrench size, union nut	28 mm
External cable diameter	10 mm ... 19 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	High-grade steel
Material grip body interlock	PA-GF

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

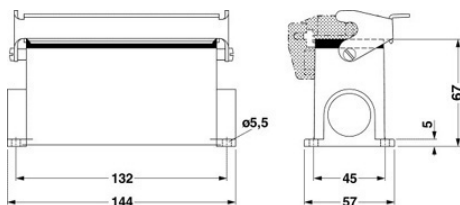

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;