

High Frequency Ceramic Solutions

2.45 GHz Band Pass Filter

P/N 2450BP15F0100

Detail Specification: 08/31/07

Page 1 of 2

General Specifications

Part Number	2450BP15F0100	
Frequency (MHz)	2400 - 2500	
Insertion Loss	2.5 dB max.	
Return Loss	9.5 dB min.	
Attenuation (min.)	824 ~ 960MHz	35 dB
Attenuation (min.)	1710 ~ 1910MHz	38 dB
Attenuation (min.)	4800 ~ 5000MHz	25 dB
Attenuation (min.)	7200 ~ 7500MHz	20 dB

Input Power	3 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000


P/N	Packaging Style	Bulk	Suffix = S	Eg. 2450BP15F0100
		T & R	Suffix = E	Eg. 2450BP15F0100
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 2450BP15F0100(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 2450BP15F0100(E or S)/Pb

Terminal Configuration

No.	Function
1	GND
2	IN
3	GND
4	GND
5	OUT
6	GND

Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.022 ± 0.004	0.55 ± 0.10
a	0.016 ± 0.008	0.40 ± 0.20
b	0.016 ± 0.008	0.40 ± 0.20
c	0.012 +.004/-.008	0.30 +0.1/-0.2
g	0.016 ± 0.008	0.40 ± 0.20
p	0.031 ± 0.004	0.80 ± 0.10




Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

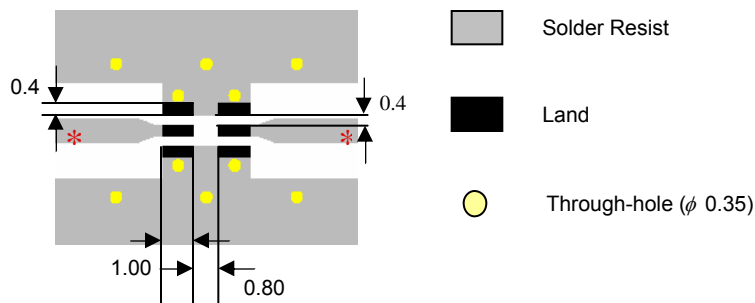

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


2.45 GHz Band Pass Filter

P/N 2450BP15F0100

Detail Specification: 08/31/07

Page 2 of 2

Typical Electrical Performance (T=25°C)

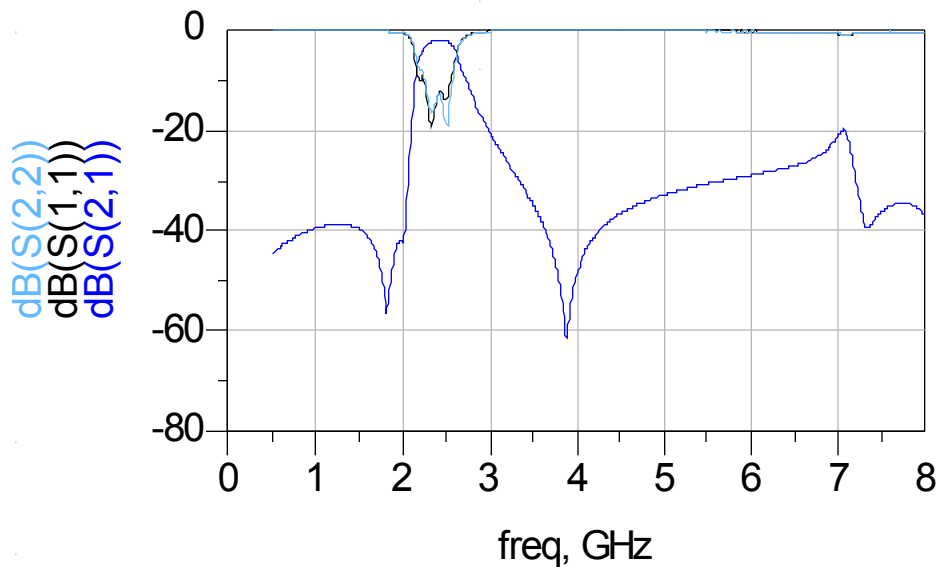

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

[2450BP15F0100E](#) [2450BP15G0100E](#)