

(de)

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 BC639-10 BC639-16

# **Features**

- Halogen free available upon request by adding suffix "-HF"
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1
- Marking: BC639


# **Maximum Ratings**

Symbol	Rating	Value	Unit
$V_{CEO}$	Collector-Emitter Voltage	80	V
$V_{CBO}$	Collector-Base Voltage	100	V
$V_{EBO}$	Emitter-Base Voltage	5.0	V
Ic	Collector Current	1.0	Α
Pc	Collector Power Dissipation	1	W
$T_J$	Junction Temperature	-55 to +150	$^{\circ}\mathbb{C}$
$T_{STG}$	Storage Temperature	-55 to +150	$^{\circ}\mathbb{C}$

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Тур	Max	Units	
OFF CHARACTERISTICS						
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage $(I_C=1 \text{mAdc}, I_B=0)$	80			Vdc	
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage (I <sub>C</sub> =100 µ Adc,I <sub>E</sub> =0)	100			Vdc	
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage (I <sub>E</sub> =100 µ Adc,I <sub>C</sub> =0)	5.0			Vdc	
I <sub>CBO</sub>	Collector Cutoff Current (V <sub>CB</sub> =30Vdc, I <sub>E</sub> =0)			0.1	μ Adc	
I <sub>EBO</sub>	Emitter Cutoff Current (V <sub>EB</sub> =5.0Vdc, I <sub>C</sub> =0)			0.1	μ Adc	
h <sub>FE</sub>	$\begin{array}{lll} DC \ Current \ Gain \\ (V_{CE}=2Vdc, \ l_{C}=5mAdc) \\ (V_{CE}=2Vdc, \ l_{C}=150mAdc) \\ (V_{CE}=2Vdc, \ l_{C}=150mAdc) \\ (V_{CE}=2Vdc, \ l_{C}=500mAdc) \\ \end{array} BC639-16$	25 63 100 25	  	160 250	  	
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage (I <sub>C</sub> =500mAdc,I <sub>B</sub> =50mAdc)			0.5	Vdc	
V <sub>BE</sub>	Base-Emitter Voltage (I <sub>C</sub> =500mAdc, V <sub>CE</sub> =2Vdc)			1.0	Vdc	
f <sub>T</sub>	Transition Frequency (V <sub>CE</sub> =5.0Vdc, I <sub>C</sub> =50mAdc, f=100MHz)	100			MHz	

# NPN Epitaxial Silicon Transistors

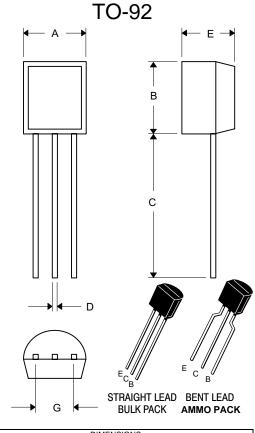

DIMENSIONS						
	INCHI	ES	MM			
DIM	MIN	MAX	MIN	MAX	NOTE	
Α	.175	.185	4.45	4.70		
В	.175	.185	4.45	4.70		
С	.500		12.70			
D	.016	.020	0.41	0.63		
Е	.135	.145	3.43	3.68		
G	.095	.105	2.42	2.67	Straight Lead	
G	.173	.220	4.40	5.60	Bent Lead	

<sup>\*</sup> For ammo packing detailed specification, click here to visit our website of product packaging for details.



#### **Micro Commercial Components**

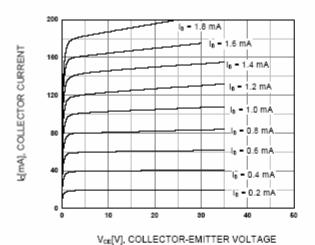


Figure 1. Static Characteristic

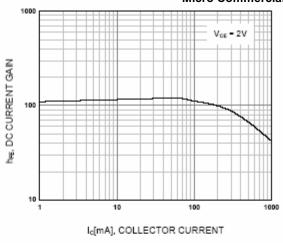


Figure 2. DC current Gain

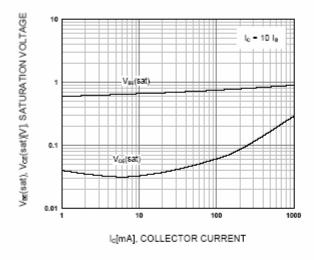


Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

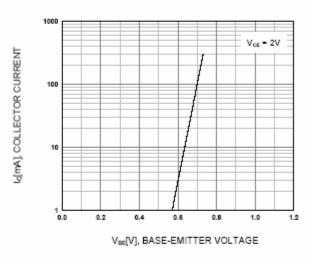


Figure 4. Base-Emitter On Voltage

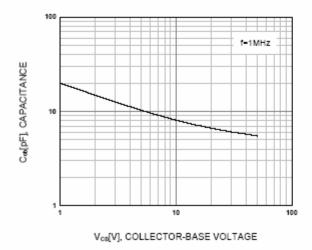


Figure 5. Collector Output Capacitance

www.mccsemi.com

Revision: D 2 of 3 2013/01/01



## Ordering Information:

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 100Kpcs/Carton

Note: Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.