

Marker card - SK 2,8 REEL P3,5 WH CUS - 0825121

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marker card, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, for terminal block width: 3.5 mm, Lettering field: Continuous x 2.8 mm

The figure shows a version of the article

Why buy this product

- The markers supplied in card format can be easily labeled using standard laser printers
- The markers that are supplied in roll format can be labeled quickly and cost-effectively using THERMOMARK printers
- The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove
- Labeling service: Phoenix Contact can custom-label SK markers according to your requirements
- Ideal for labeling COMBICON connectors
- The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove



Key commercial data

Packing unit	1 pc
GTIN	 4 046356 355049
Weight per Piece (excluding packing)	0.48 g
Custom tariff number	39191080
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Width (a)	2.8 mm
-----------	--------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 150 °C
Ambient temperature (assembly)	> 15 °C
Recommended storage conditions	23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing.

General

Marker card - SK 2,8 REEL P3,5 WH CUS - 0825121

Technical data

General

Note	Marking up to max. 25-pos.
Color	white
Components	free from silicone and halogen
Material	Polyester
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of marker strips	14
Adhesive	Acrylic
Printability	Thermal transfer
Device	5146477 THERMOMARK ROLL
	5146231 THERMOMARK X1.2
Ink ribbon	5145384 THERMOMARK-RIBBON 110
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Alternating condensation climate with SO2 test specification	DIN 50018:2013-05
Climate level	AHT 1.0 S
Cycles	2
Condensation test result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Foil strength	53 µm
Adhesive strength	20 µm
Marking mounting type	Adhesive

Classifications

eCl@ss

eCl@ss 4.0	24190219
eCl@ss 4.1	24190219
eCl@ss 5.0	27141137
eCl@ss 5.1	27141137
eCl@ss 6.0	27141137
eCl@ss 7.0	27141137
eCl@ss 8.0	27141137

Marker card - SK 2,8 REEL P3,5 WH CUS - 0825121

Classifications

ETIM


ETIM 3.0	EC000761
ETIM 4.0	EC000761
ETIM 5.0	EC000761

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Drawings

Schematic diagram

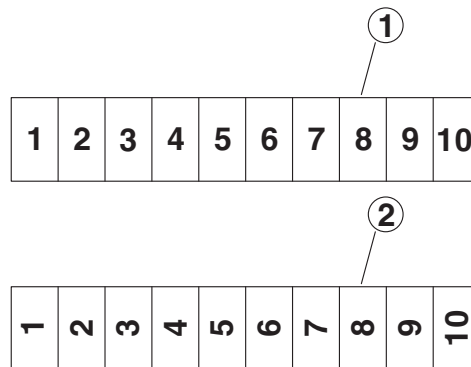

- ① Horizontal
- ② Vertical