


Z terminal with tension spring connection ZDU 35 BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

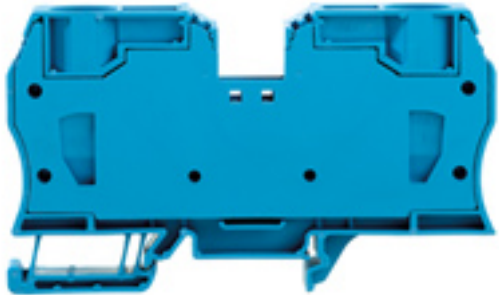

Terminal blocks in tension clamp system and the Z Series are specially customised to the customers' requirements. Less space, spacious labelling area, integrated test point, cross-connection functionality within the Z Series and another family of terminals by Weidmüller. Z-Series terminals have a large clamping range and one or two cross-connection slots. Plug-in standard cross-connections enable potentials to be distributed over any number of terminals.

General ordering data

Type	ZDU 35 BL
Order No.	1739630000
Version	Z terminal with tension spring connection, Feed-through terminal, Rated cross-section: 35 mm ² , Tension clamp connection, Wemid, Blue, Direct mounting
GTIN (EAN)	4008190957087
Qty.	10 pc(s).

**Z terminal with tension spring connection
ZDU 35 BL**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data
Dimensions and weights

Length	100.5 mm	Width	16 mm
Height	58.5 mm	Height of lowest version	59.5 mm
Net weight	83.209 g		

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Rated data IECEx/ATEX

Certificate No. (ATEX)	KEMA00ATEX2 107U	ATEX certificate	KEMA00ATEX2 107U_d.pdf
ATEX certificate	KEMA00ATEX2 107U_e.pdf	IEC Ex certificate	IECExULD05.0009U_e.pdf
Max. voltage (ATEX)	690 V	Current (ATEX)	109 A
Wire cross section max. (ATEX)	35 mm ²	Voltage, cross-connection	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	
Marking ATEX Directive 94/9/EC	II 2 G D		Ex e II

Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	closed
Type of mounting	Snap-on	Version	Tension-clamp connection, for plug-in cross-connector, closed

CSA ratings data

Certificate No. (CSA)	200039-1 152892	Voltage size B (CSA)	600 V
Voltage size C (CSA)	600 V	Voltage size D (CSA)	600 V
Current size B (CSA)	120 A	Current size C (CSA)	120 A
Current size D (CSA)	5 A	Wire cross section max. (CSA)	2 AWG
Wire cross section min. (CSA)	12 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	2.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	35 mm ²
---	---------------------	---	--------------------

**Z terminal with tension spring connection
ZDU 35 BL**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Clampable wires (rated connection)**

Type of connection	Tension clamp connection	Stripping length	25 mm
Blade size	1.0 x 5.5 mm	Connection direction	top
Number of connections	2	Clamping range, rated connection, min.	2.5 mm ²
Clamping range, rated connection, max.	35 mm ²	Gauge to IEC 60947-1	A8
Wire connection cross section, solid core, max. rated connection	2.5 mm ²	Wire connection cross section, solid core max. rated connection	16 mm ²
Wire connection cross section, stranded, rated connection, min.	2.5 mm ²	Wire connection cross section, stranded, rated connection, max.	35 mm ²
Wire connection cross section, finely stranded, max.	35 mm ²	Wire connection cross-section, finely stranded, min.	2.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	2.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	35 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	2.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	35 mm ²
Wire connection cross section AWG, min.	AWG 12	Wire connection cross section AWG, max.	AWG 2

Rated data

Rated cross-section	35 mm ²	Rated voltage	800 V
Rated impulse withstand voltage	8 kV	Rated current	125 A
Current at maximum wires	125 A	Standards	IEC 60947-7-1
Pollution severity	3		

UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	600 V
Current size C (UR)	120 A	Conductor size Factory wiring max. (UR)	2 AWG
Conductor size Factory wiring min. (UR)	12 AWG	Conductor size Field wiring max. (UR)	2 AWG

Material data

Insulating material	Wemid	Material	Wemid
Colour	Blue	UL 94 flammability rating	V-0

System specifications

Product family	Z terminal with tension spring connection	Type of connection	Tension clamp connection
Connection direction	top	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	End cover plate required	No

Classifications

ETIM 3.0	EC000897	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-20	eClass 6.2	27-14-11-20
eClass 7.1	27-14-11-20		

Data sheet

**Z terminal with tension spring connection
ZDU 35 BL**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Product information

Descriptive text ordering data	End plate is integrated. 1000 VDC rated voltage tested.
Descriptive text technical data	Cross-connection of ZDU 10 and ZDU 35 is possible using the ZQV 35-10. Cross-connection of ZDU 16 and ZDU 35 is possible using the ZQV 35-16.

Approvals

Approvals



ROHS

Conform