

**Industrial Ethernet
IE-BH-V04P**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



PushPull plug-in connector according to IEC
61076-3-106 ver.4 (IEC24702), plastic, empty housing

General ordering data

Type	IE-BH-V04P
Order No.	1963520000
Version	Empty enclosure, Flange-mounted housing, Variant 4 to IEC 61076-3-106, IP 67
GTIN (EAN)	4032248645619
Qty.	10 pc(s).

Data sheet

**Industrial Ethernet
IE-BH-V04P**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Net weight 18.6 g

Temperatures

Operating temperature -40 °C...70.000000 °C Storage temperature
 Installation temperature

Downloads

GOST Approval POCC DE.ME25.B01411.pdf UL Approval DUXR.E316369.pdf

General data

Colour		Configuration	Plug housing with labelling/marketing holder: 9*11 mm; suitable for holding RJ45 and fibre-optic inserts
	Miscellaneous		
Housing main material	PA UL 94 V0	Plugging cycles	750
Protection degree	IP 67	Seal material	EPDM
Sheath diameter, max.	10 mm	Sheath diameter, min.	5 mm
Type of mounting	4 screws, Central nut		

Standards

Connector standard IEC 61076-3-106 Var. 4 Certificate no. (cULus) E316369

Classifications

ETIM 3.0 EC001121 UNSPSC 30-21-18-17
 eClass 5.1 27-26-12-03 eClass 6.2 27-25-05-04
 eClass 7.1 27-25-05-04

Approvals

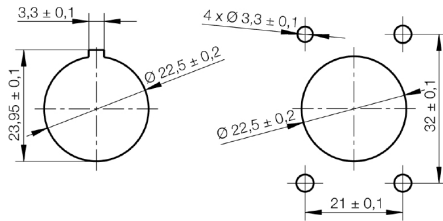
Approvals



ROHS Conform

**Industrial Ethernet
IE-BH-V04P**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings**Installation cut-out**

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws