

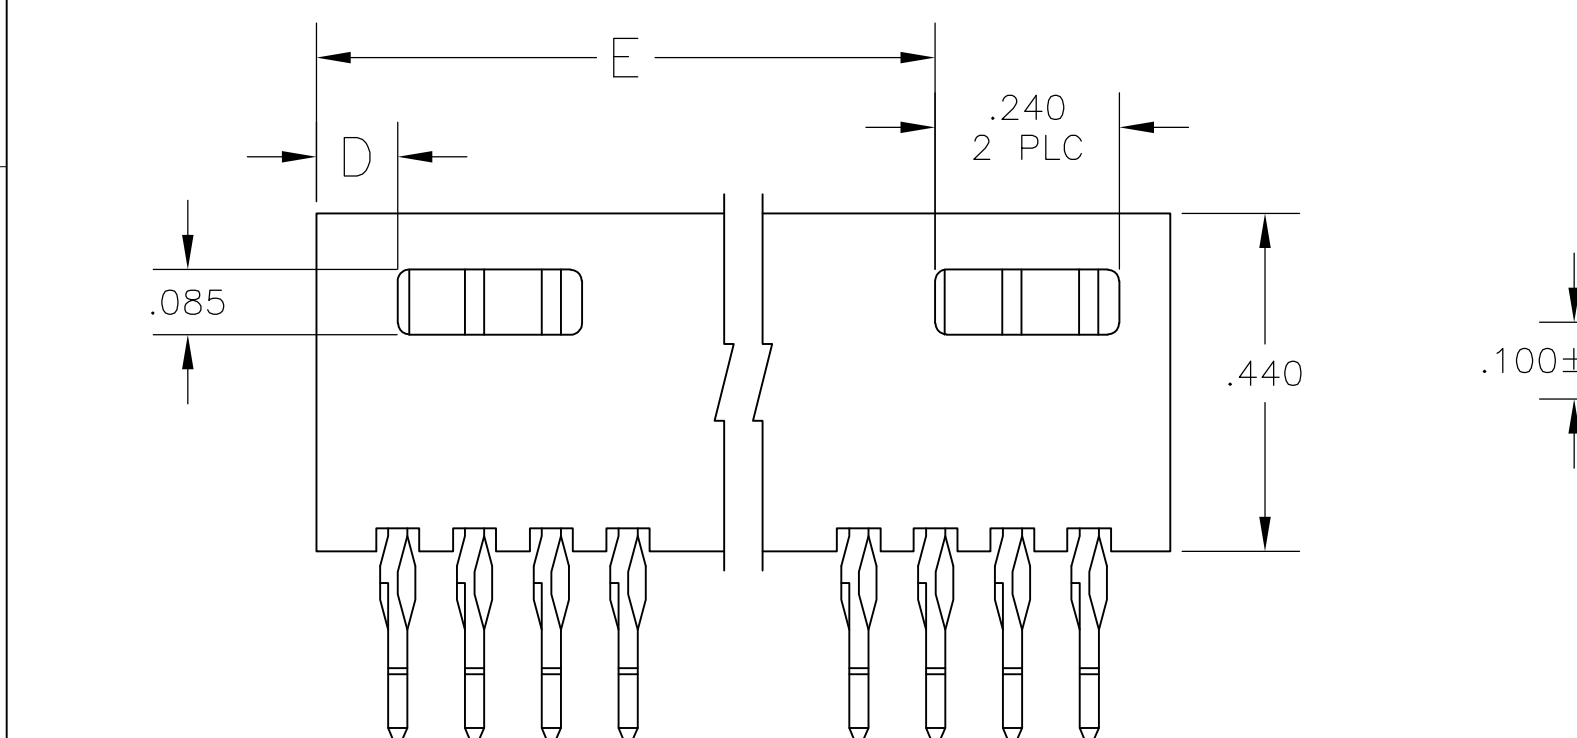
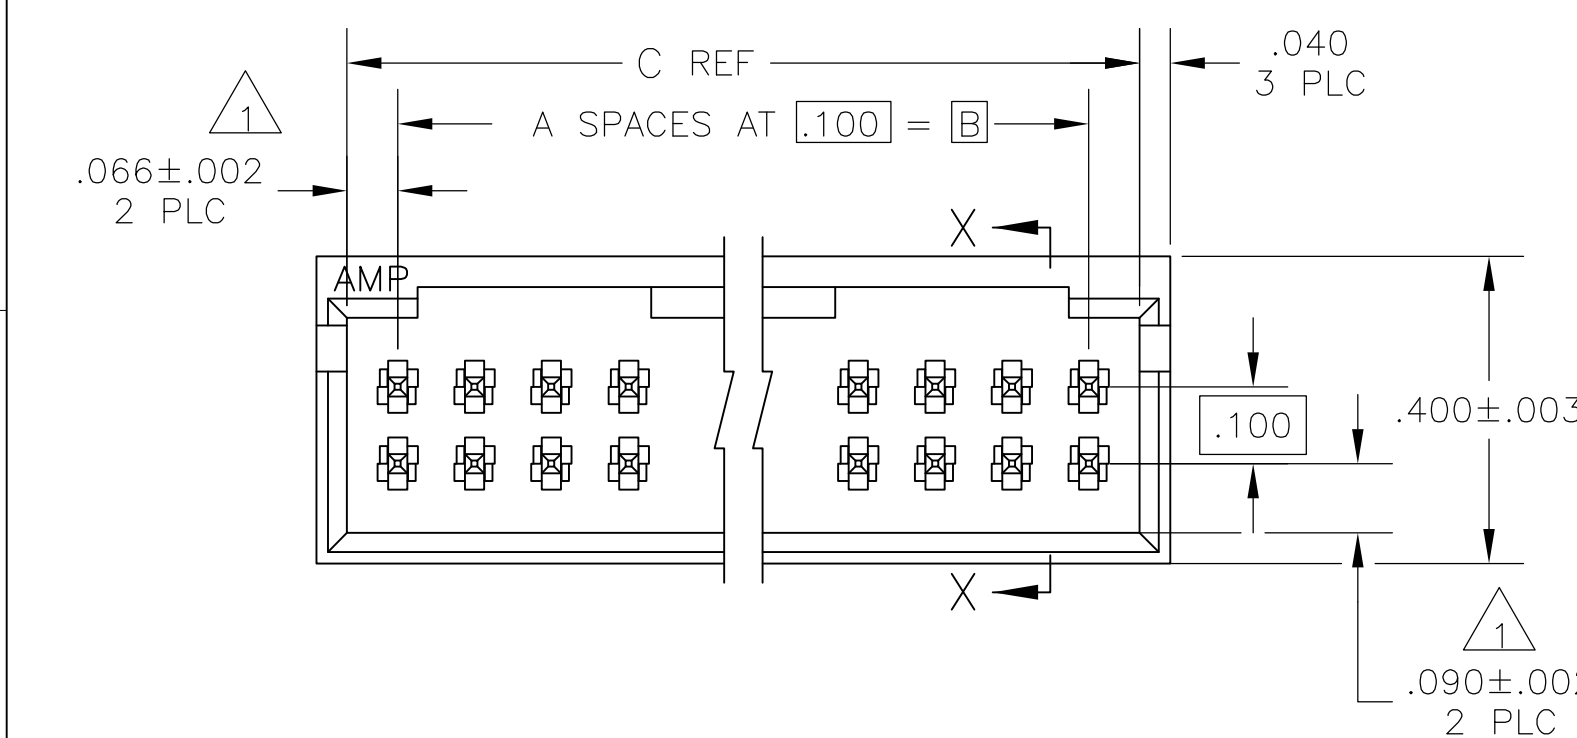



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		B	EC 0G3C 0224 05	11MAY05	BSV	JLG
			B1	REVISED PER ECO-09-023929	24OCT09	KK	AEG

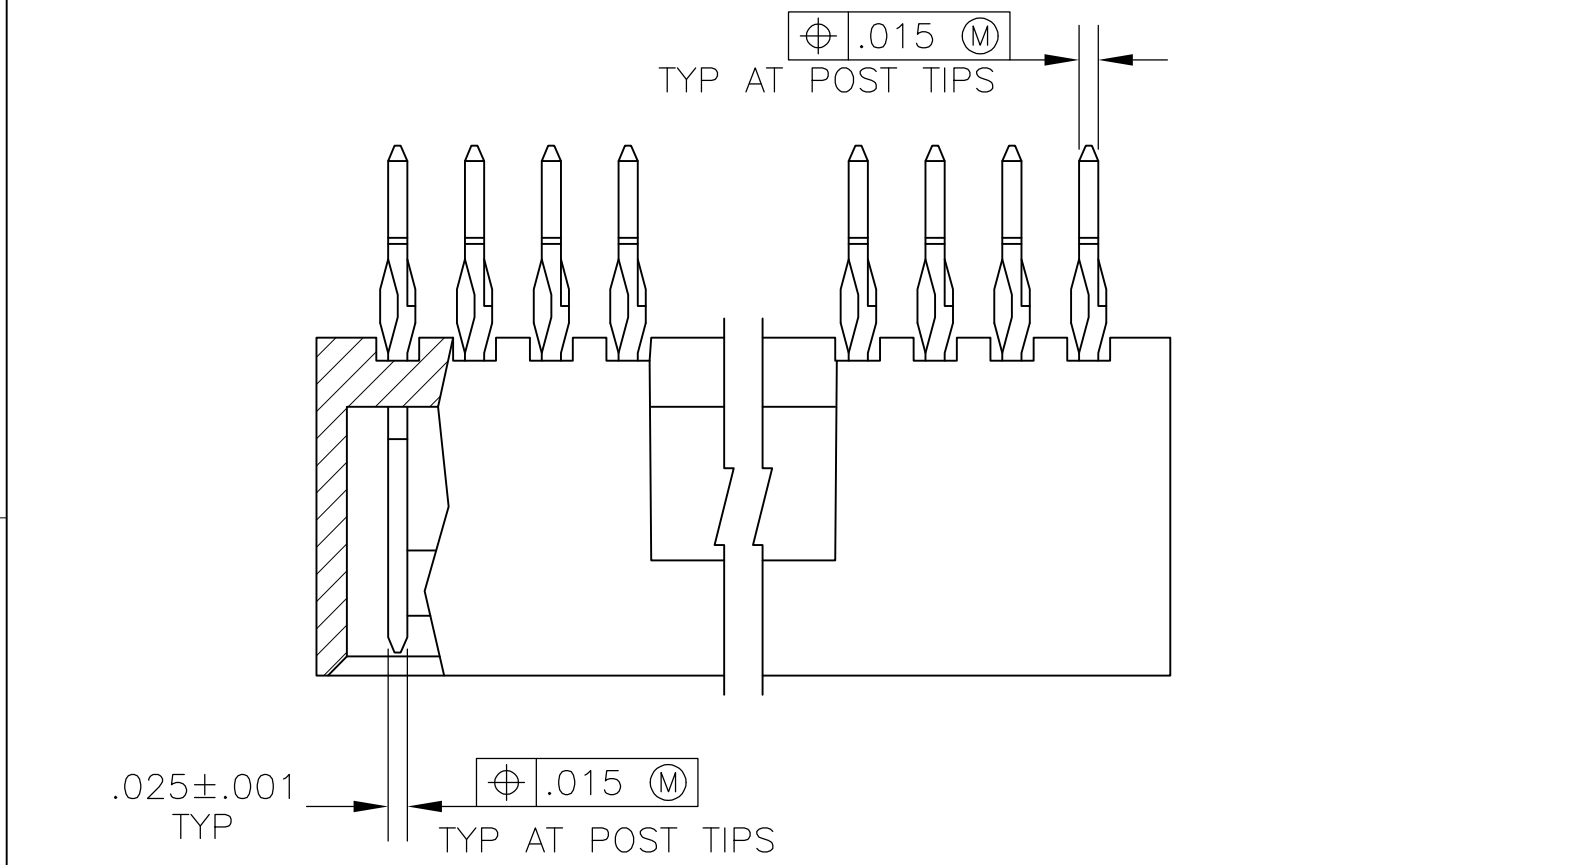

- 1
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2
- POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3
- POSTS: .000030 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 4
- POSTS: .000030 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 5
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

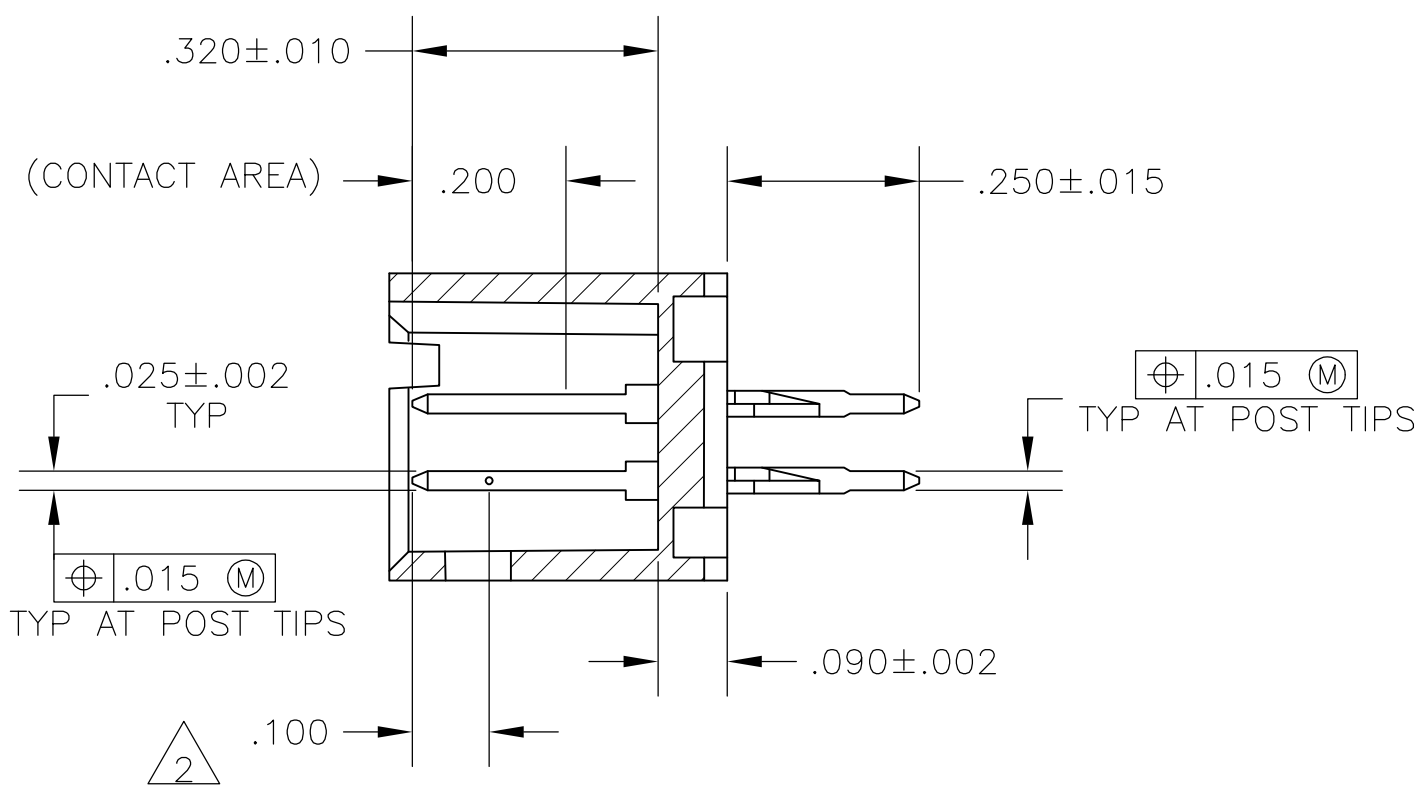


SECTION X-X

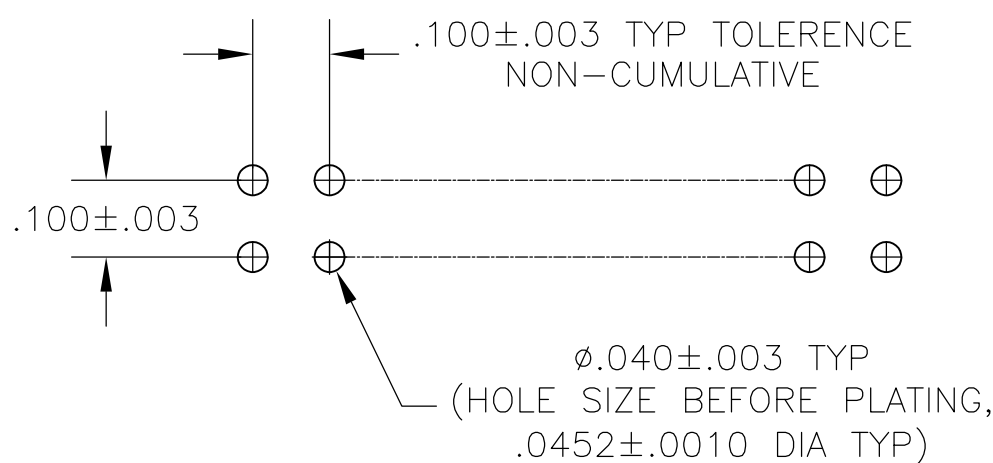

RECOMMENDED HOLE LAYOUT

5 OBSOLETE	4	.806	.106	1.032	.900	9	20	5-1571311-1
	3	.806	.106	1.032	.900	9	20	1571311-1
	PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN	06JUN02	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608				
		CHK J GESFORD	06JUN02					
DIMENSIONS: INCHES		APVD J GESFORD	06JUN02	NAME HDR ASSY, MOD II, COMPLIANT PIN, DBL ROW, .100X.100 CL, 4 SIDED SHROUD, FOR .062 THICK PCB				
		PRODUCT SPEC —						
		APPLICATION SPEC —						
		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR—BLACK POSTS — Cu—Ni—Sn		WEIGHT —	A2	00779	C=1571311	—		
SEE TABLE		CUSTOMER DRAWING			SCALE 4:1	SHEET 1 of 1	REV B1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1571311-1](#)