


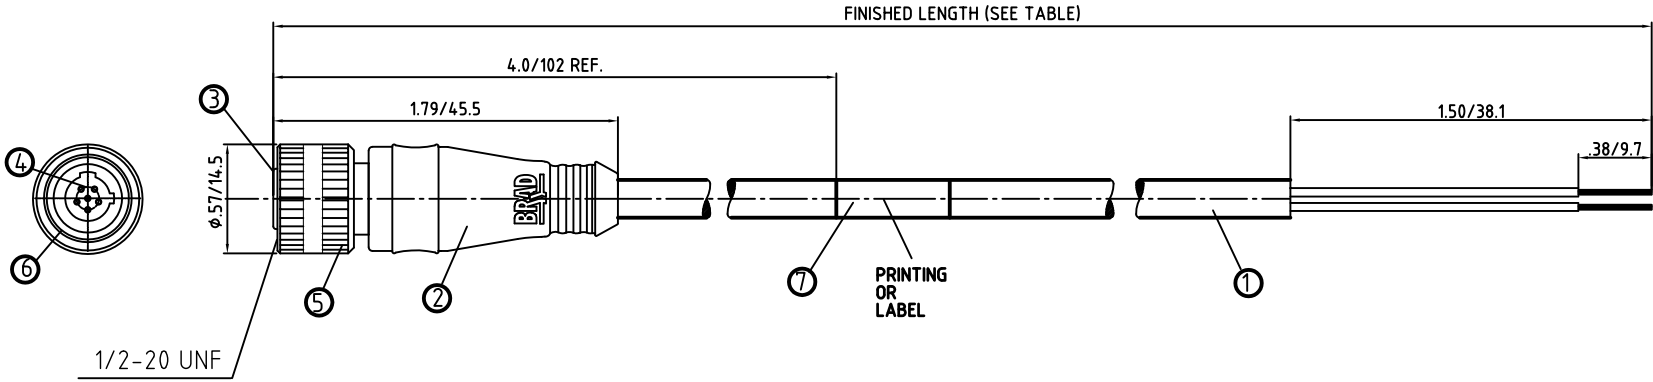

CONNECTOR SPECIFICATION:


VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED,FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	NITRILE	RED
5	COUPLING NUT	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 18 AWG (41x#34 COPPER STRANDING) 2-6 CONDUCTORS 300V	PVC	YELLOW

FRONT VIEW - FEMALE INSERT WIRING COLOR CODE
VISTA FRONTAL - INSERTO HEMBRA

2 POLE	3 POLE	4 POLE	5 POLE	6 POLE
1-BROWN CAFE 2-BLUE AZUL	2-RED W/BLK.TR. ROJO/NEGRO 3-RED W/WHT.TR. ROJO/BLANCO 1-GREEN VERDE	1-RED W/BLK.TR. ROJO/NEGRO 2-RED W/WHT.TR. ROJO/BLANCO 4-GREEN VERDE (TIERRA) 3-RED ROJO	1-RED W/WHT.TR. ROJO/BLANCO 5-RED W/BLK.TR. ROJO/NEGRO 4-RED W/YEL. TR. ROJO/AMARILLO 3-GREEN (GND) VERDE (TIERRA) 2-RED ROJO	5-RED W/BLK. TR. ROJO/NEGRO 1-REDW/WHT.TR. ROJO/BLANCO 4-RED W/YEL.TR. ROJO/AMARILLO 6-RED W/BLUE TR. ROJO/AZUL 2-RED ROJO 3-GREEN (GND) VERDE (TIERRA)

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 08.03.10 2010/03/10	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				DRAWN BY LSTEMMLE	DATE 2010/02/05	MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY FE STR #18/2-6 YELLOW PVC CABLE					
				CHECKED BY FP	DATE 2010/03/09						
				APPROVED BY FPACHER	DATE 2010/03/09	molex MOLEX INCORPORATED					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE SHEET 2		DOCUMENT NO. SD-120072-012			SHEET NO. 1 OF 2		
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

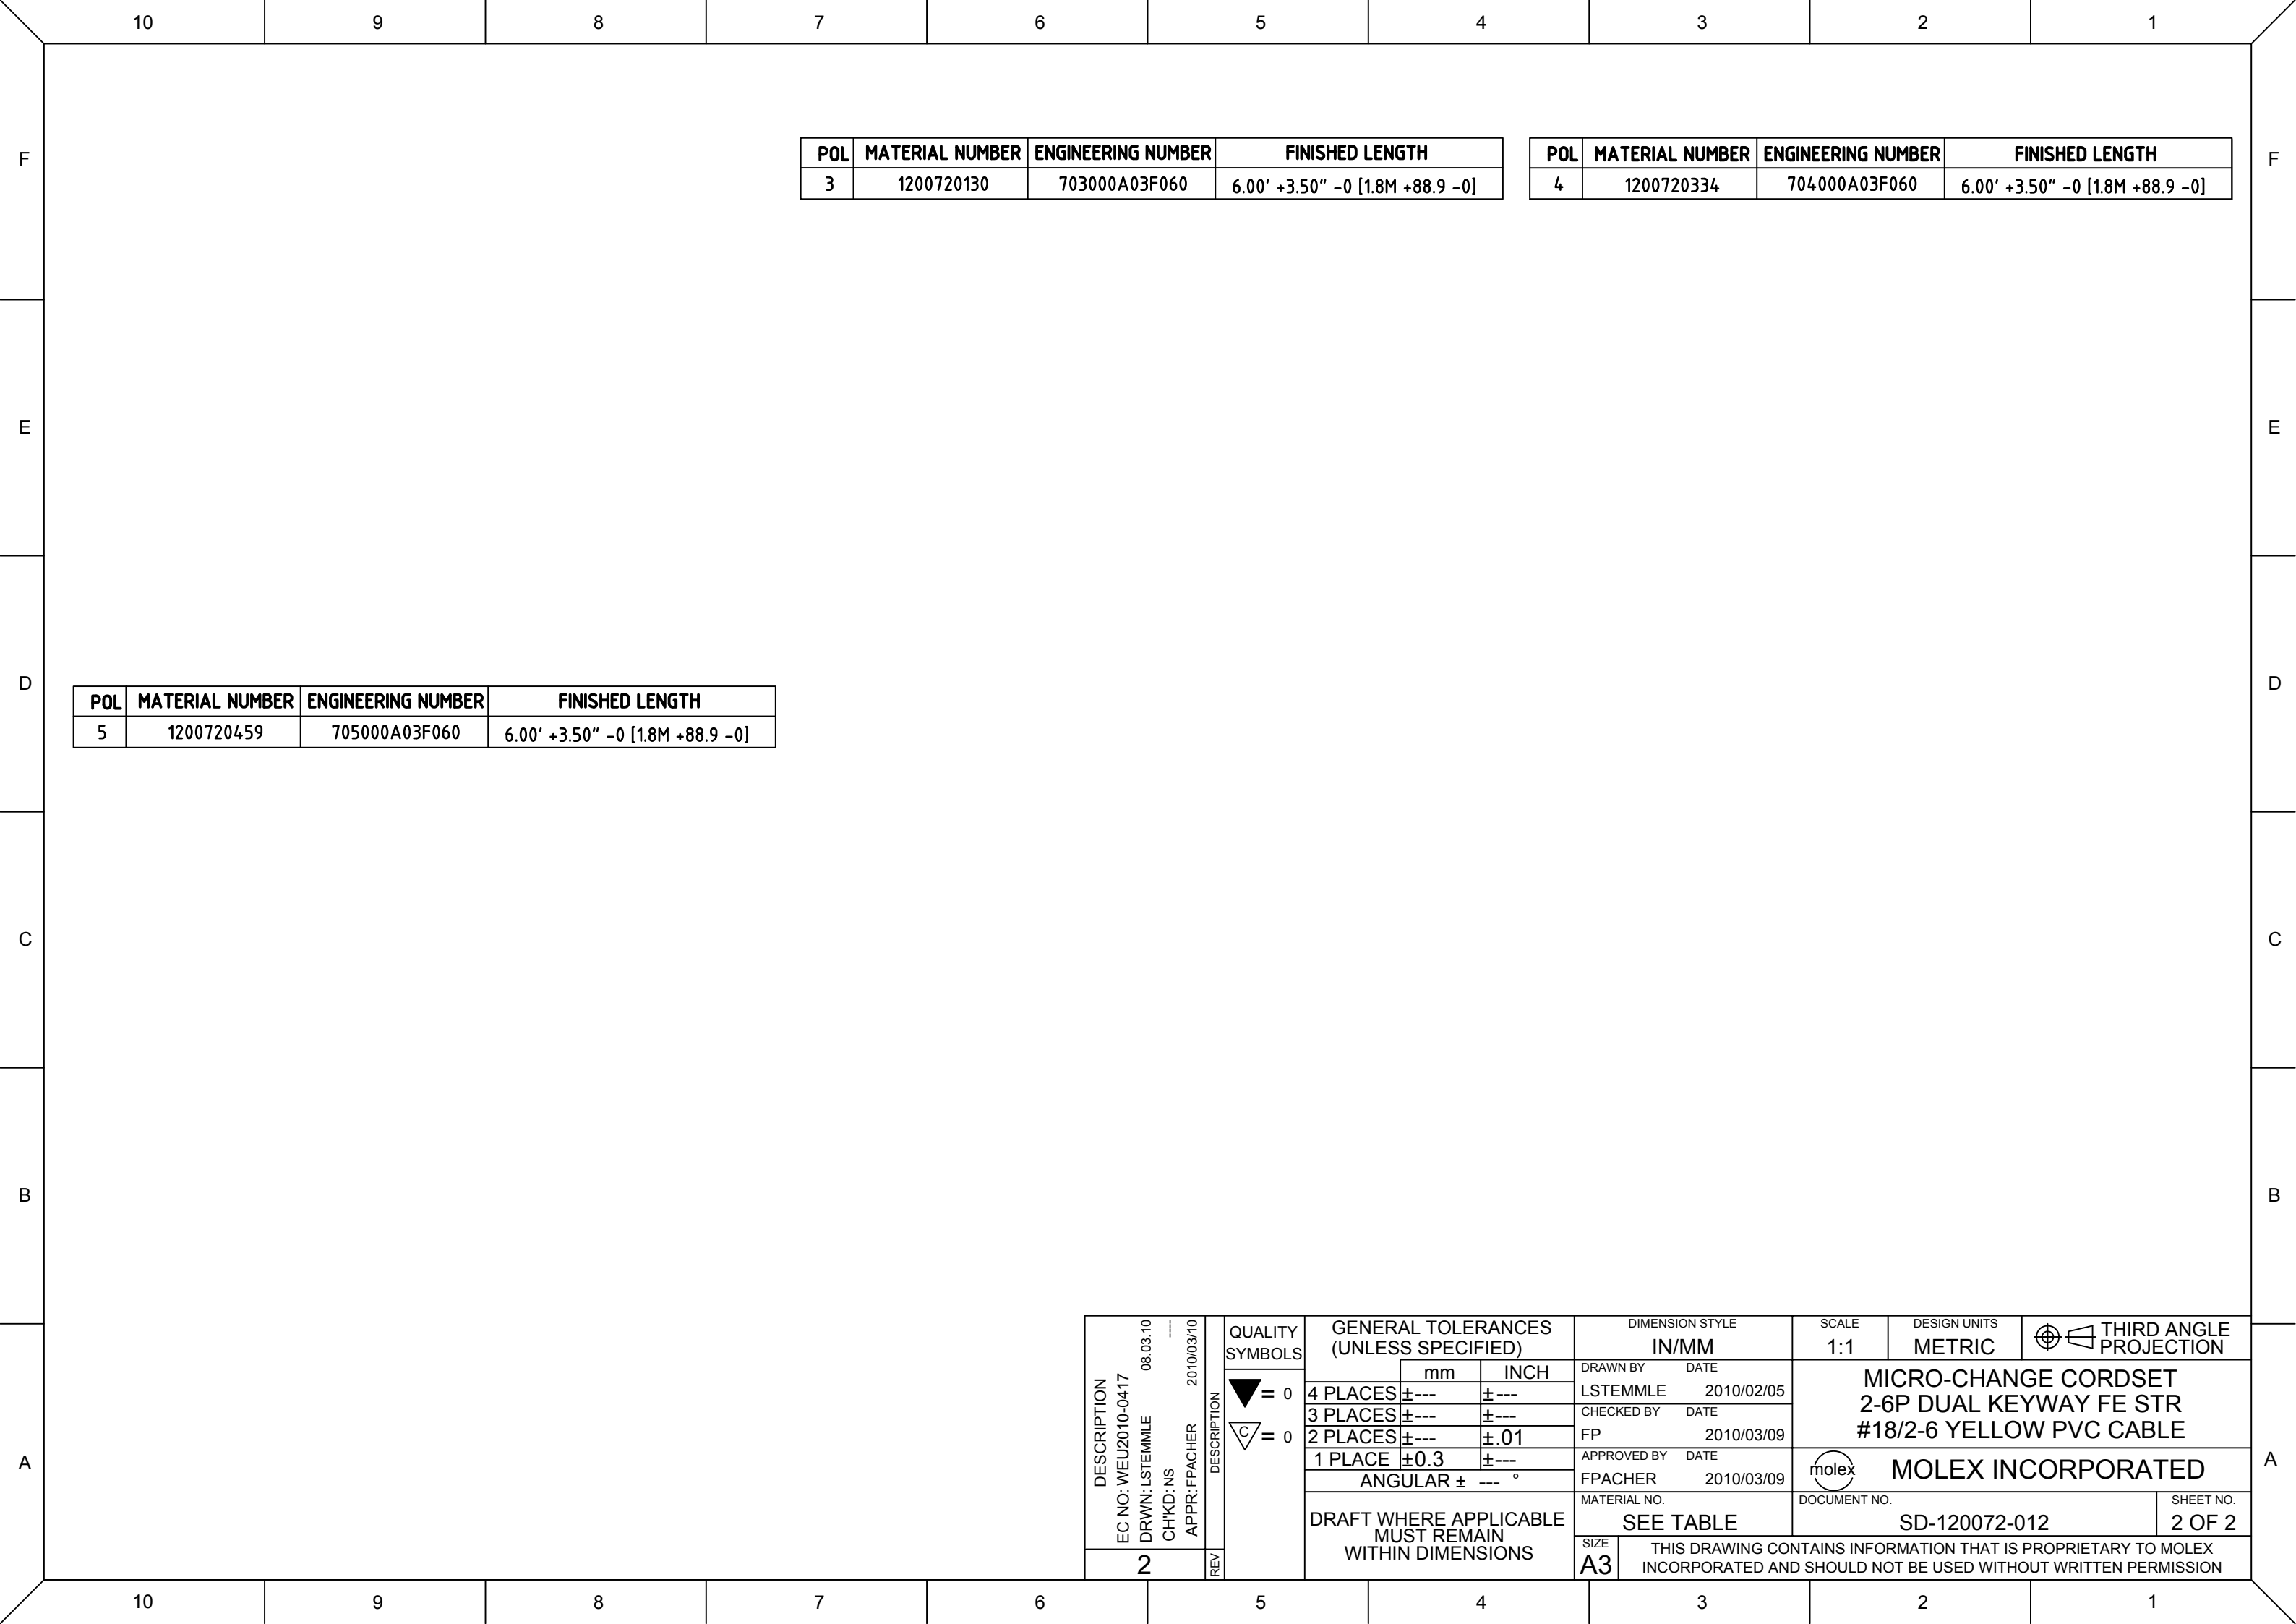

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200720130	703000A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200720334	704000A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200720459	705000A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

DESCRIPTION EC NO: WEU2010-0417 08.03.10 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 2010/03/10	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				DRAWN BY LSTEMMLE	DATE 2010/02/05	MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY FE STR #18/2-6 YELLOW PVC CABLE			
				CHECKED BY FP	DATE 2010/03/09				
				APPROVED BY FPACHER	DATE 2010/03/09	MOLEX INCORPORATED			
		ANGULAR ± --- °		MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-120072-012				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					