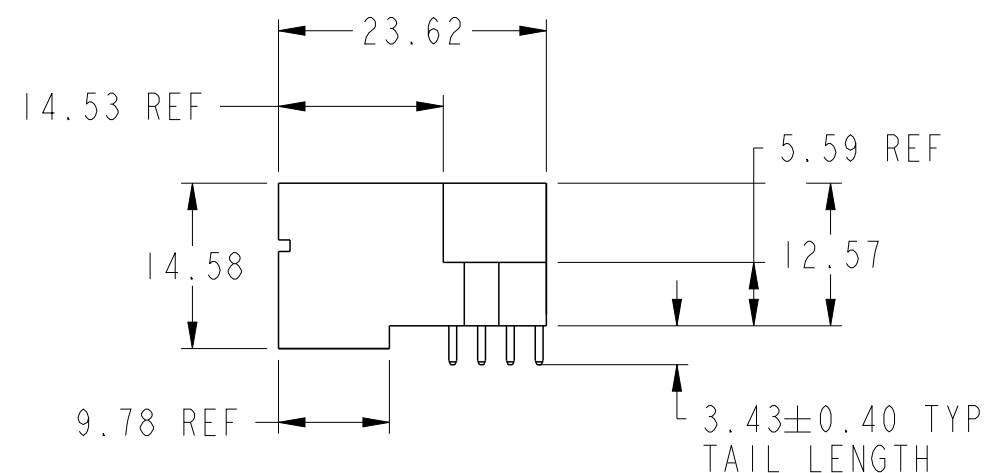
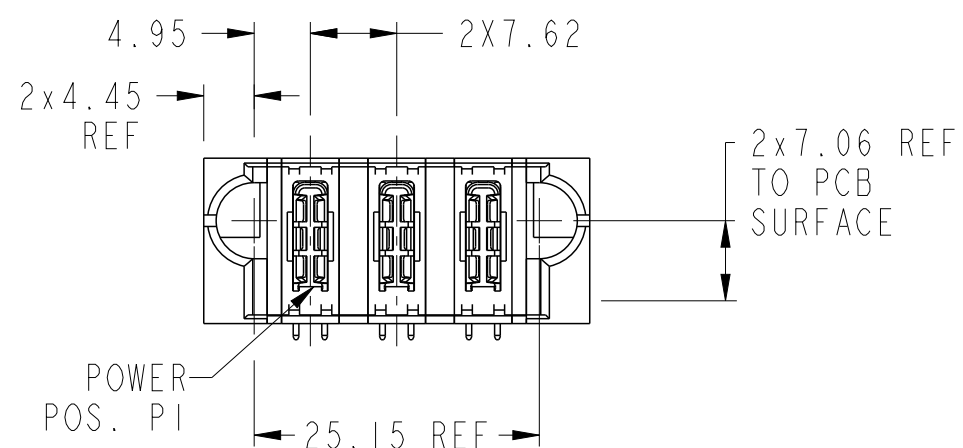
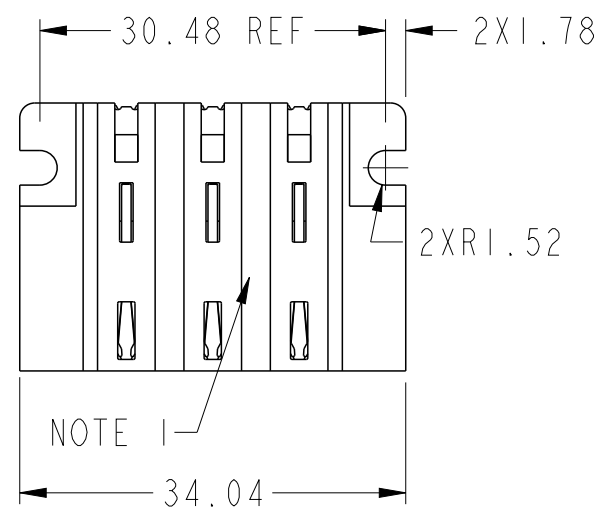


spec ref *				dr		Xie Bob	2013/08/29		projection		MM		size		A3		scale		3:2								
tolerance std				eng		Xie Bob	2013/09/12						ecn no								-						
ASME Y14.5				chr		Li- He		2013/09/12					rel level								Released						
				appr		Pei-Ming Zheng		2013/09/12					product family				PwrBlade+										
surface				linear		0.X		±0.5				title		4ACP		dwg no		10106116-3000001		rev		A					
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw				sheet 1 of 3									

A

B

C

D

A

B

C

D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Xie Bob	2013/08/29	projection	MM	size	A3	scale	3:2	
eng	Xie Bob	2013/09/12			ecn no	-			
chr	Li- He	2013/09/12							
appr	Pei-Ming Zheng	2013/09/12	product family		PwrBlade+	rel level	Released		
	title	4ACP RA STB HEADER			dwg no	10106116-3000001		rev	
									A
www.fci.com	cat. no.	Product - Customer Drw				sheet 3 of 3			