


# Housing - HC-B 16-TFL-H-M1PG29S - 1460113

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B16 sleeve housing, for single locking latch, height: 76 mm, with 1 x Pg29 screw connection, lateral cable outlet

## Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 793551
GTIN	4046356793551

## Technical data

### Dimensions

Height	76 mm
Width	43 mm
Length	94 mm
Wrench size, union nut	37 mm
External cable diameter	18 mm ... 27 mm

### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

### General

Note	For contact inserts HC-B16, BB32, BBB40, D40, DD72, HS6, M, K
Size	B16
Housing type	Sleeve housing
Locking type	for single locking latch
No. of cable outlets	1
Cable outlet	lateral
Screw connection	with
Type of the screw connection	1x Pg29

# Housing - HC-B 16-TFL-H-M1PG29S - 1460113


## Technical data

### General

Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray

## Drawings

Dimensional drawing

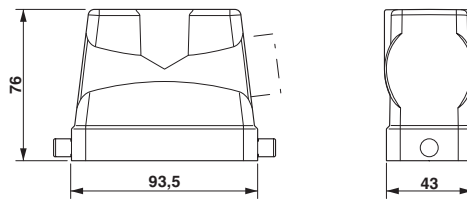

Dimensional drawing

## Approvals

Approvals

Approvals

EAC

Ex Approvals

## Approval details

EAC		RU C- DE.AI30.B.01102
-----	--	--------------------------

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1460113](#)