

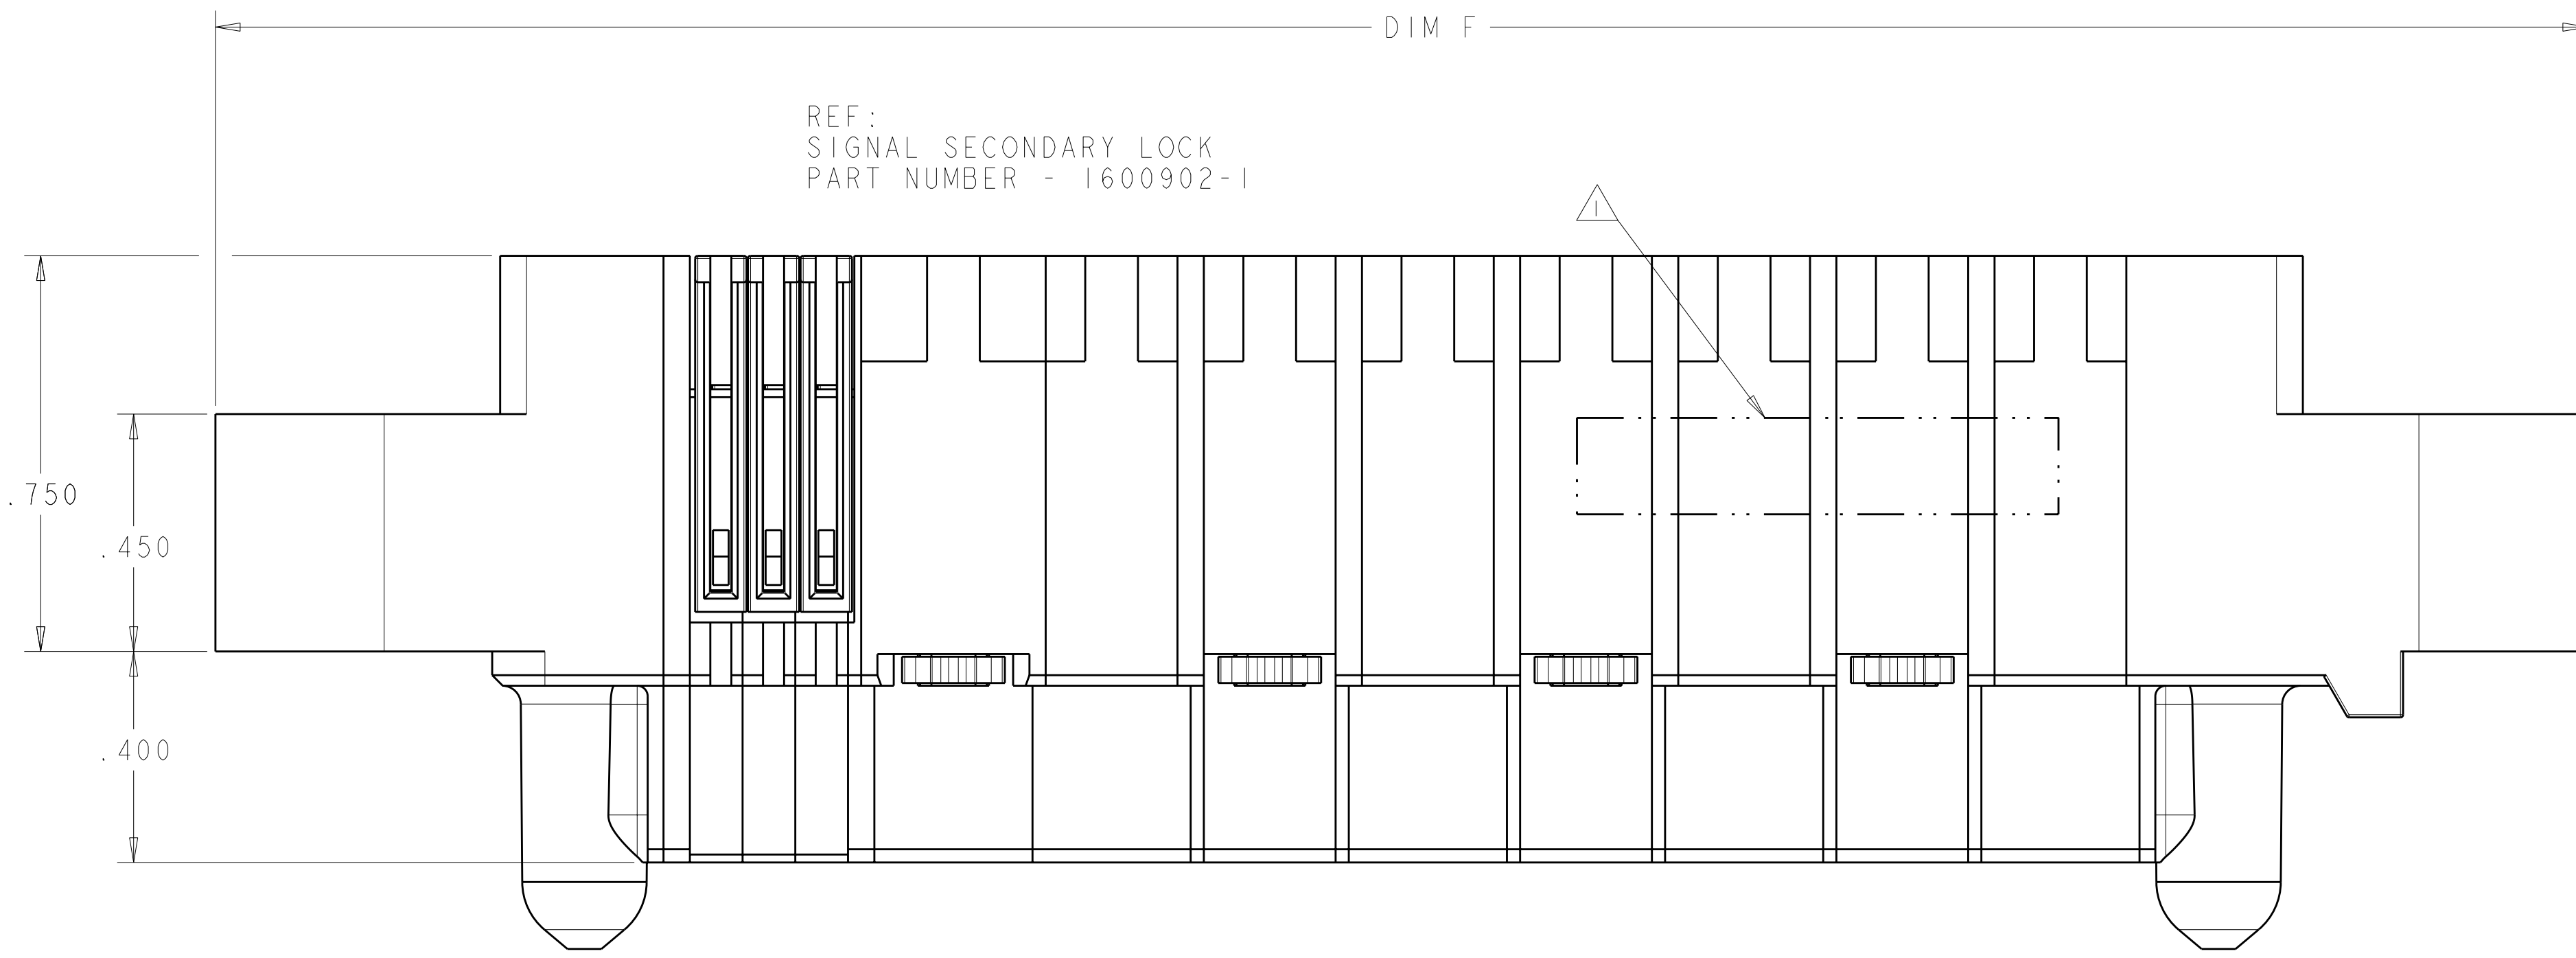
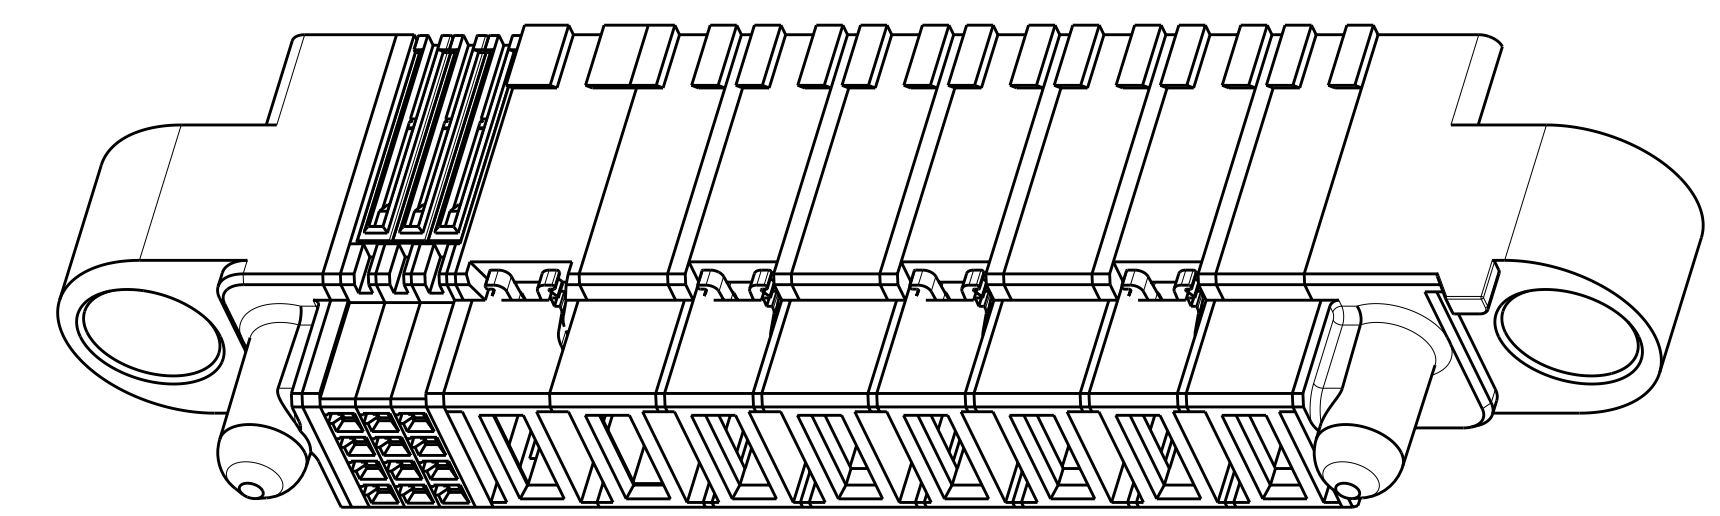


LOC	DIST	REV	DATE	BY	CHK	APPV
ES	00					
		G4	24NOV2008	HL		SY
		G5	17MAY2011	ML		SZ
		G6	05MAY2012	AY		SZ
		G7	05JUN2012	AY		SZ

REF:
SIGNAL SECONDARY LOCK
PART NUMBER - 1600902-1

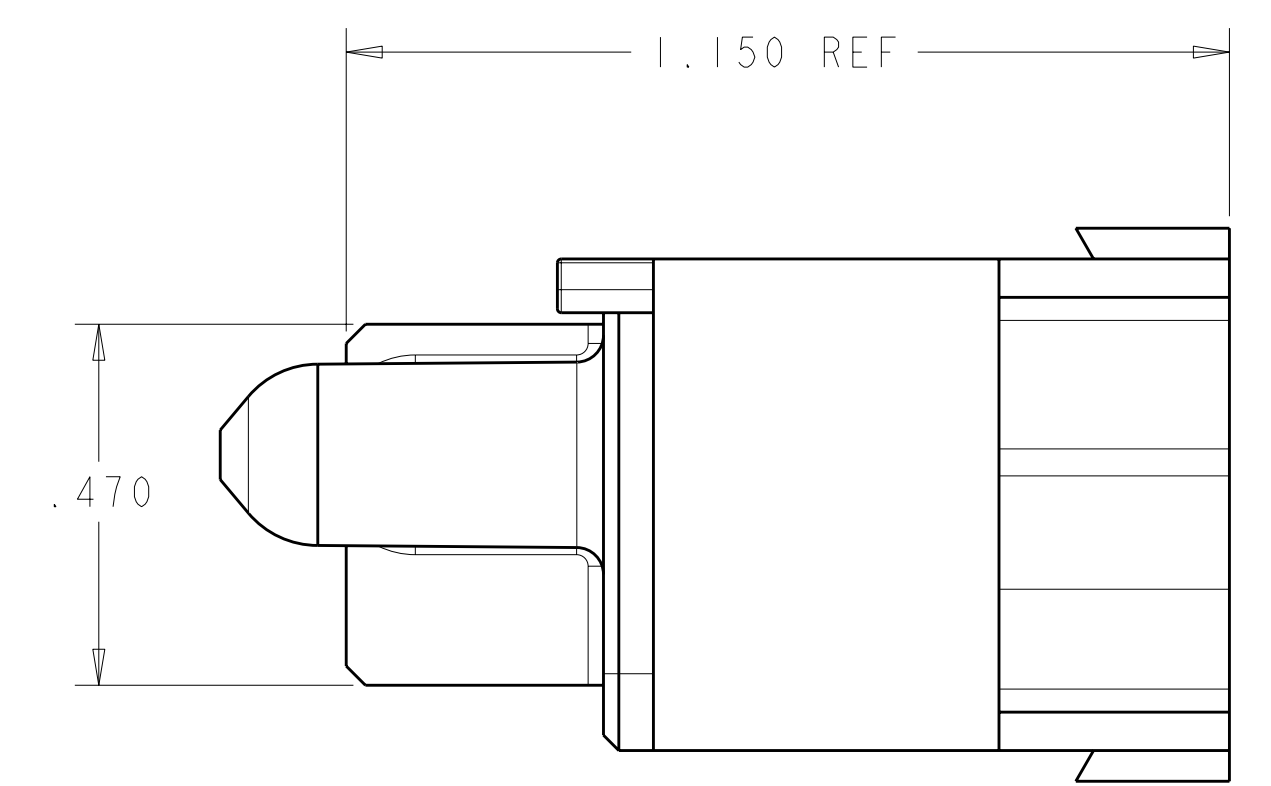

- △ COMPANY TRADEMARK, PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- △ MATERIAL: THERMO PLASTIC, UL94 V-0.
- △ DATUM LOCATIONS AND BASIC DIMENSIONS TO BE ESTABLISHED BY THE CUSTOMER.
- △ BULKHEAD THICKNESS RANGE: .031 - .100.
- △ CONNECTOR MATED TO PANEL FROM OPPOSITE SIDE.
- △ NO BURRS ALLOWED ON OPPOSITE (MATING) SIDE.
- △ CONNECTOR KEEP OUT ZONE.
- △ MOUNT CONNECTOR WITH TYCO HARDWARE KIT 1600914-1 FOR .050 (1.27mm) MIN RADIAL FLOAT.
- △ VARIABLE DIMENSION SHOW ON VIEW (SHEET 2).

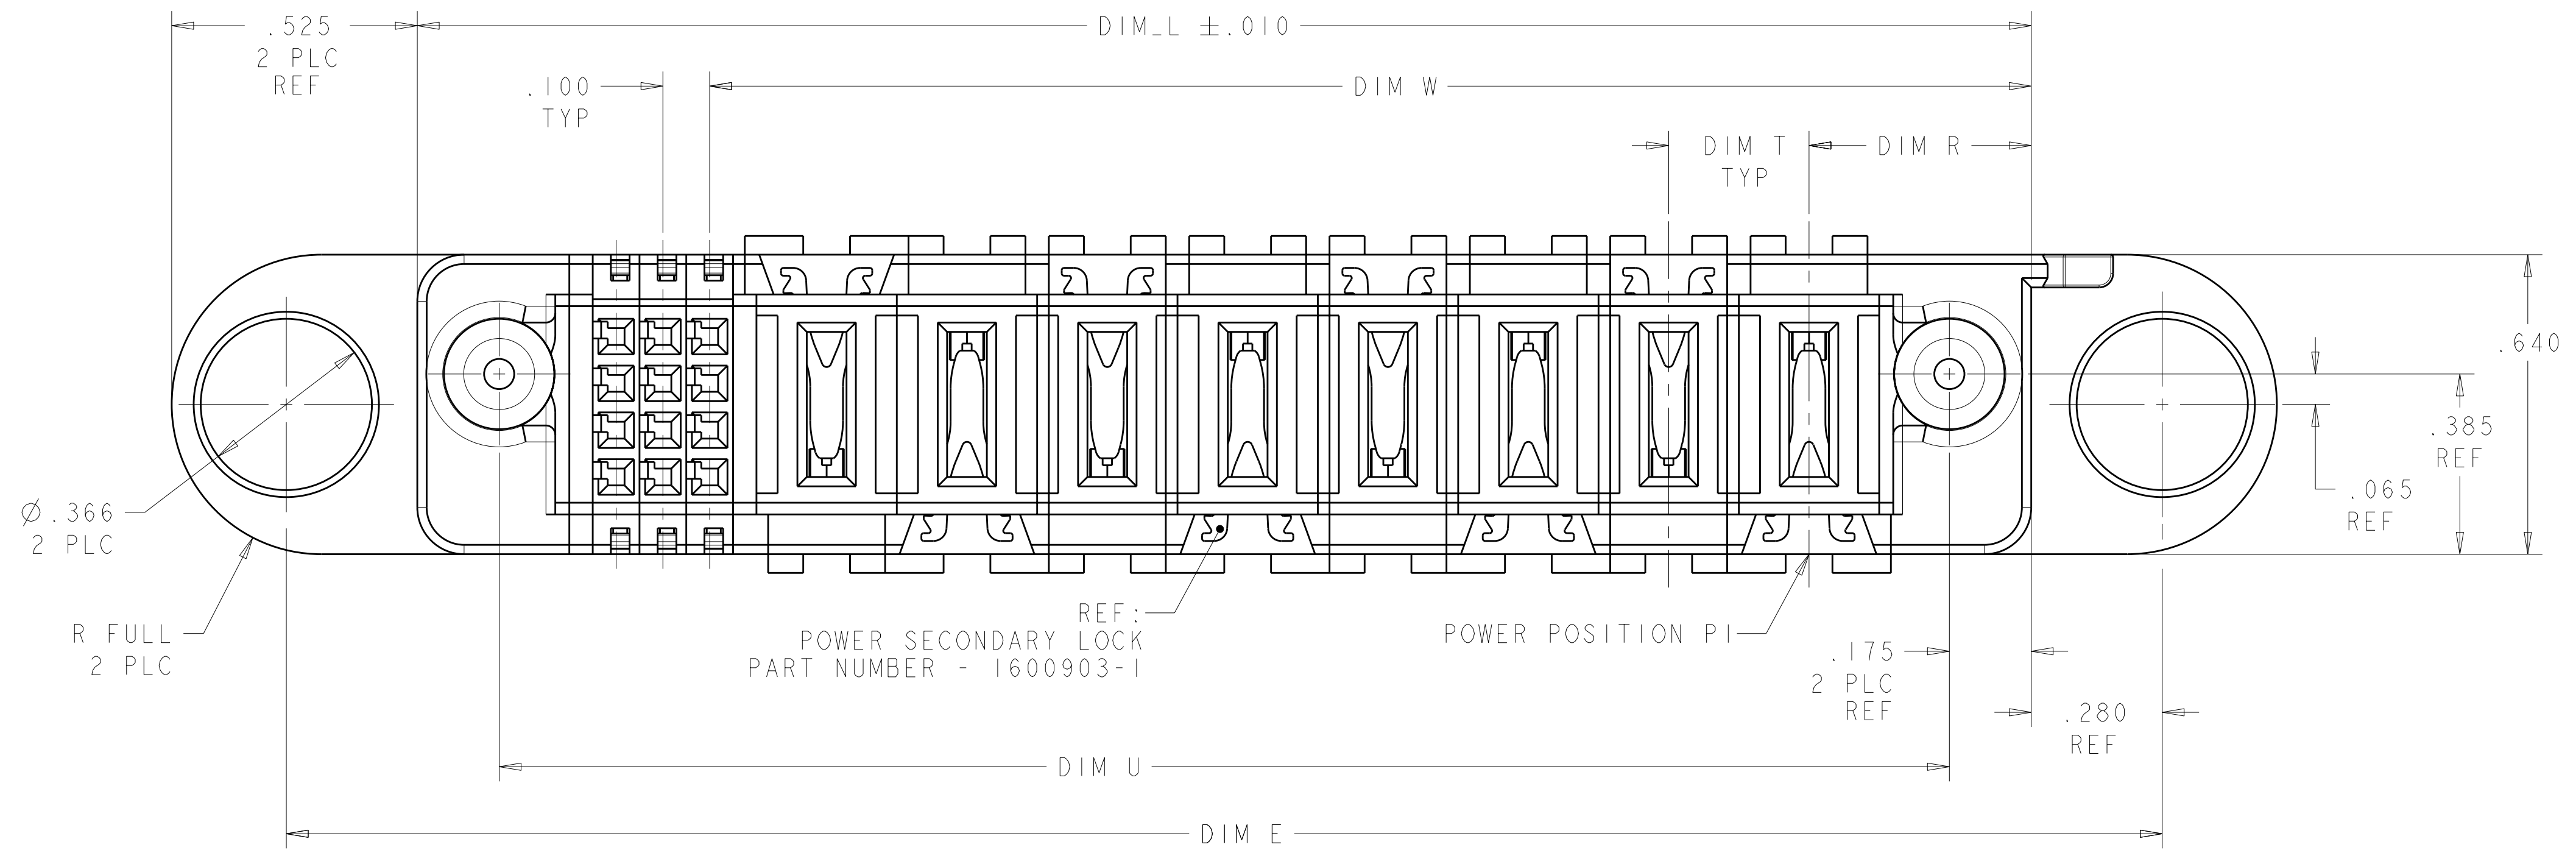

ISOMETRIC VIEW
SCALE 2:1

	DIM W	DIM U	DIM T	DIM R	DIM L	DIM F	DIM E	DESCRIPTION	PART NUMBER
⑥7	1.175	1.300	.250	.450	1.650	2.700	2.210	3P + 8S	1-1600616-1
⑥6	1.925	2.050	.250	.450	2.400	3.450	2.960	6P + 8S	1-1600616-0
⑥5	1.325	1.500	.300	.475	1.850	2.900	2.410	3ACP + 8S	1600616-9
	2.300	2.825	△9	.475	3.175	4.225	3.735	3ACP + 4P + 24S	1600616-8
	2.675	3.225	△9	.525	3.575	4.625	4.135	3ACP + 6P + 24S	1600616-7
	2.350	2.875	△9	.475	3.225	4.275	3.785	3ACP + 4P + 24S	1600616-6
	2.350	2.875	△9	.475	3.225	4.275	3.785	3ACP + 4P + 24S	1600616-5
	3.075	3.200	.300	.475	3.550	4.600	4.110	9ACP + 8S	1600616-4
	2.375	2.550	△9	.475	2.900	3.950	3.460	3ACP + 4P + 8S	1600616-3
	3.925	4.700	.250	.450	5.050	6.100	5.610	14P + 32S + 0P	1600616-2
	2.825	3.100	.300	.475	3.450	4.500	4.010	8ACP + 12S + 0P	1600616-1
	DIM W	DIM U	DIM T	DIM R	DIM L	DIM F	DIM E	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

9 PLC	±
3 PLC	±.01
5 PLC	±.005
4 PLC	±.0020
ANGLES	±.020

MATERIAL: △2

FINISH: △2

DATE: 06 JUL 2004

CHK: D. TROUT

APPV: D. TROUT

NAME: PLNEL MOUNT CABLE RECEPTACLE TYPE PS, WITH GUIDES MUTLI-BEAM XL

PRODUCT SPEC: 108-2157

APPLICATION SPEC: 114-13112

WEIGHT: -


CUSTOMER DRAWING

SCALE: 4:1



SHEET 1 OF 3

REV: G7


LOC	DIST	REV	DATE	BY	APPD
ES	00				
DESCRIPTION			DATE	DWN	APPD
SEE SHEET 1					

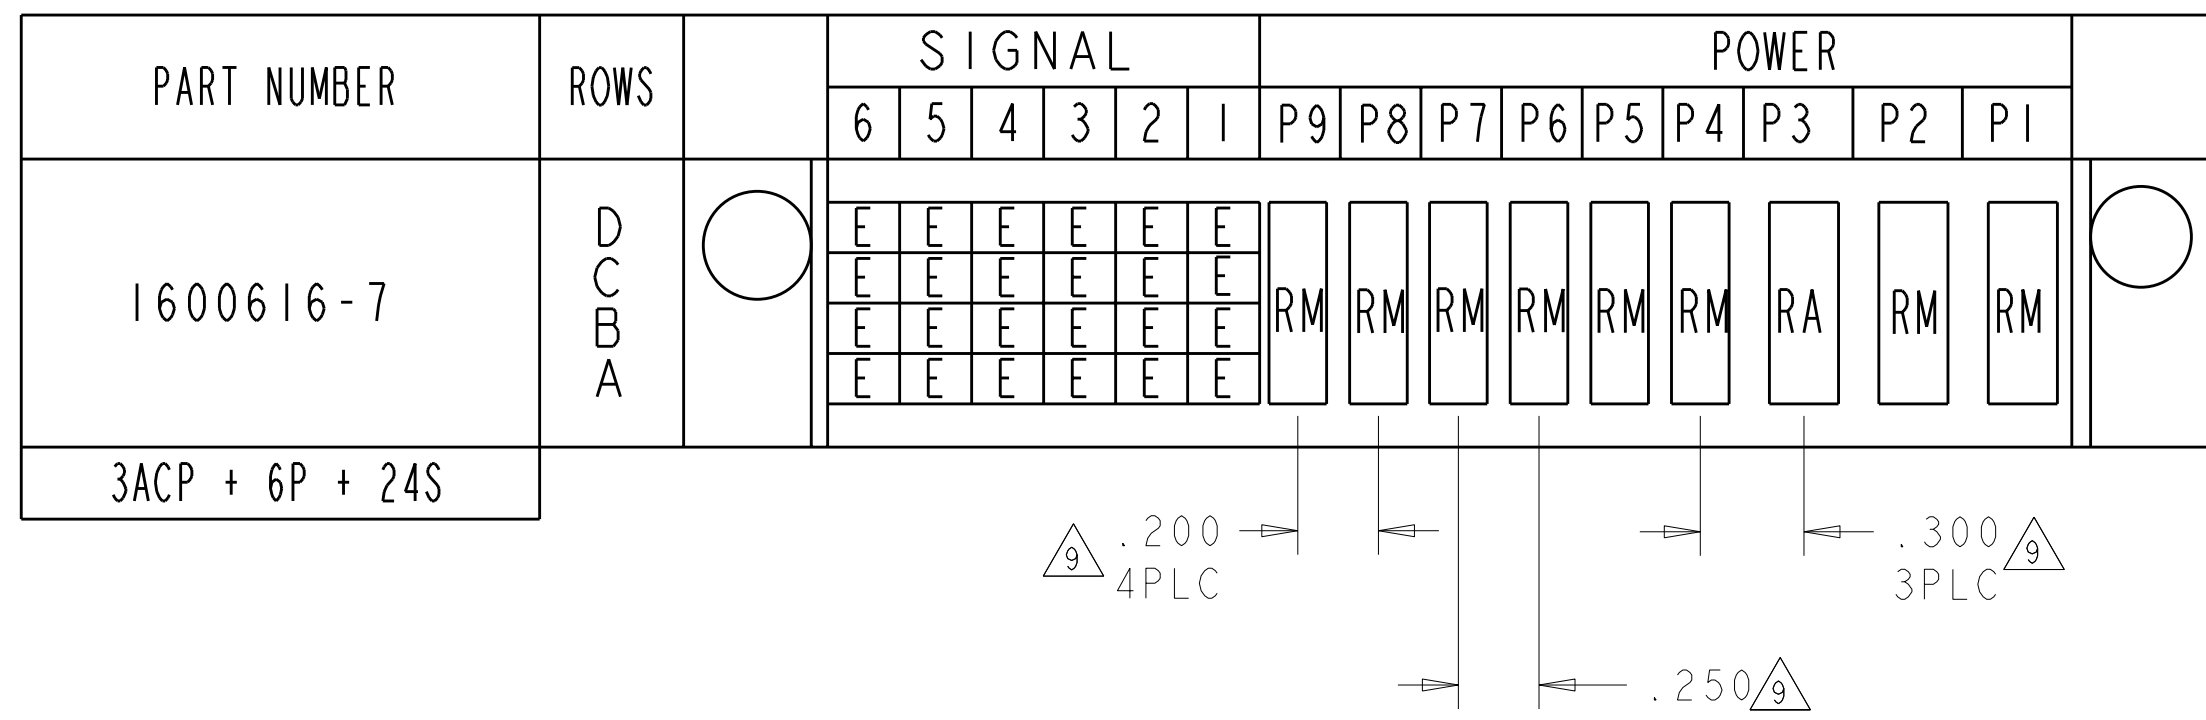


G7

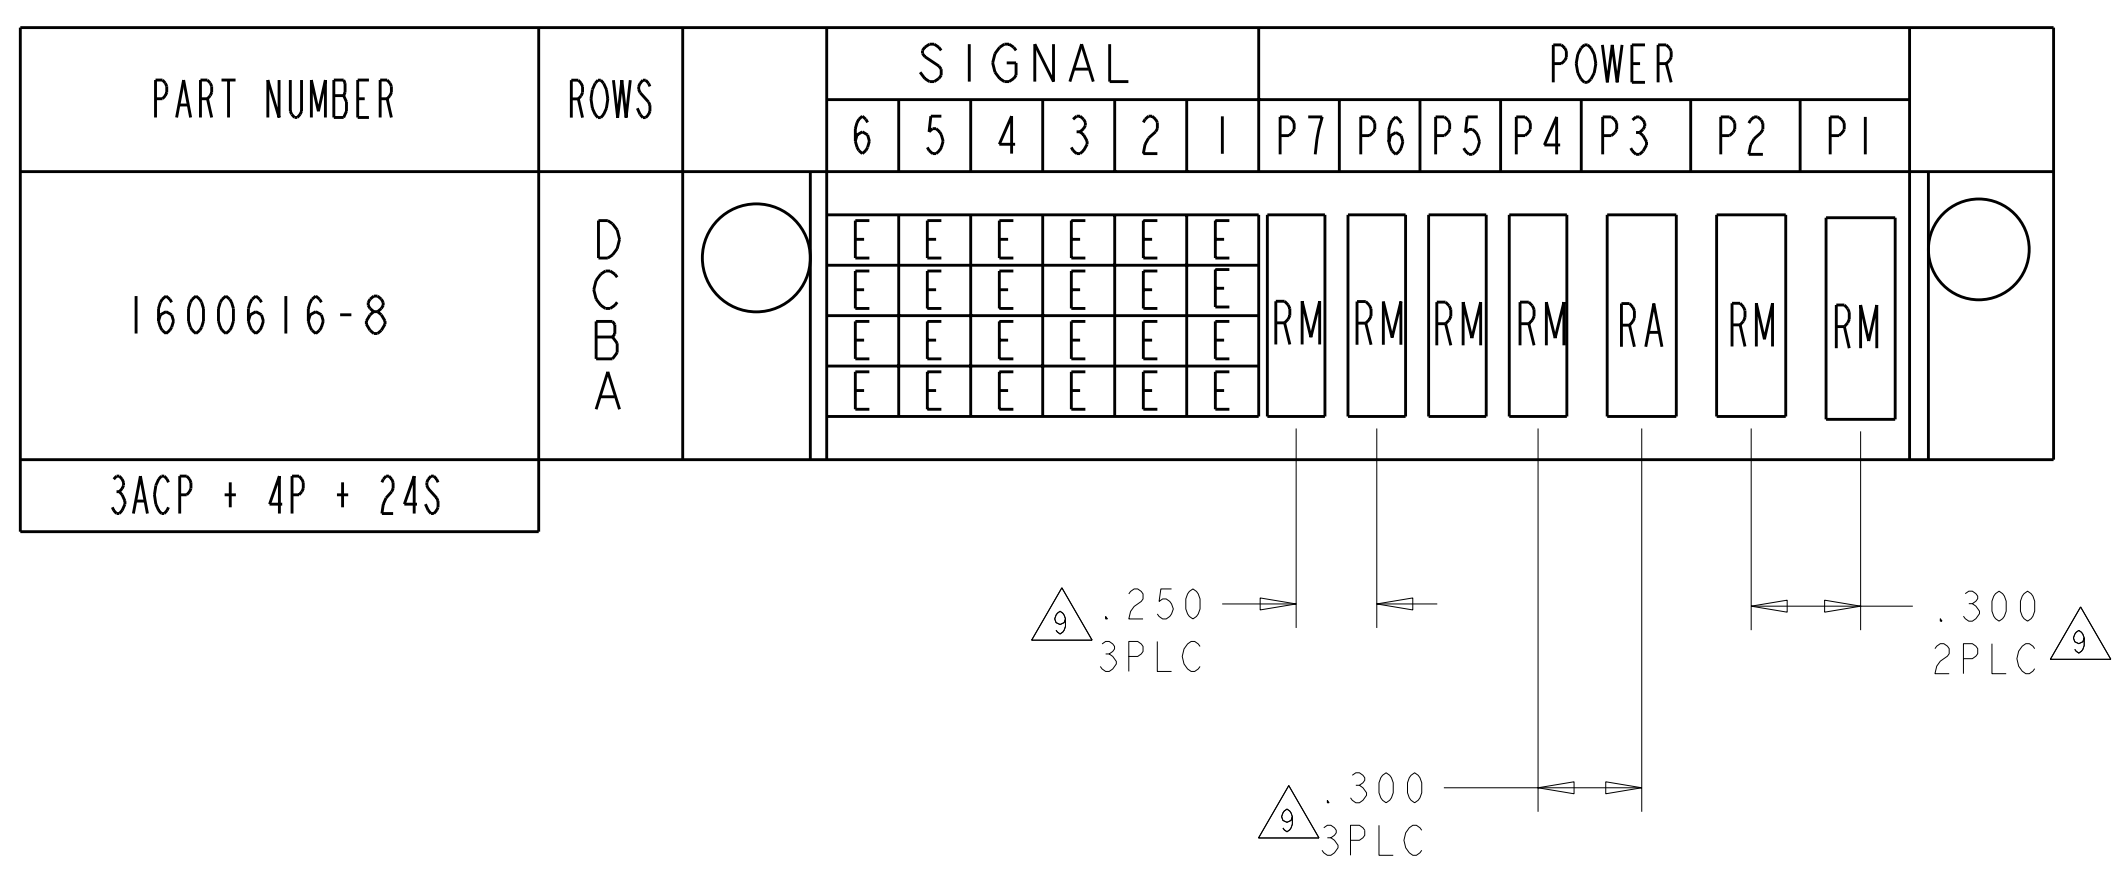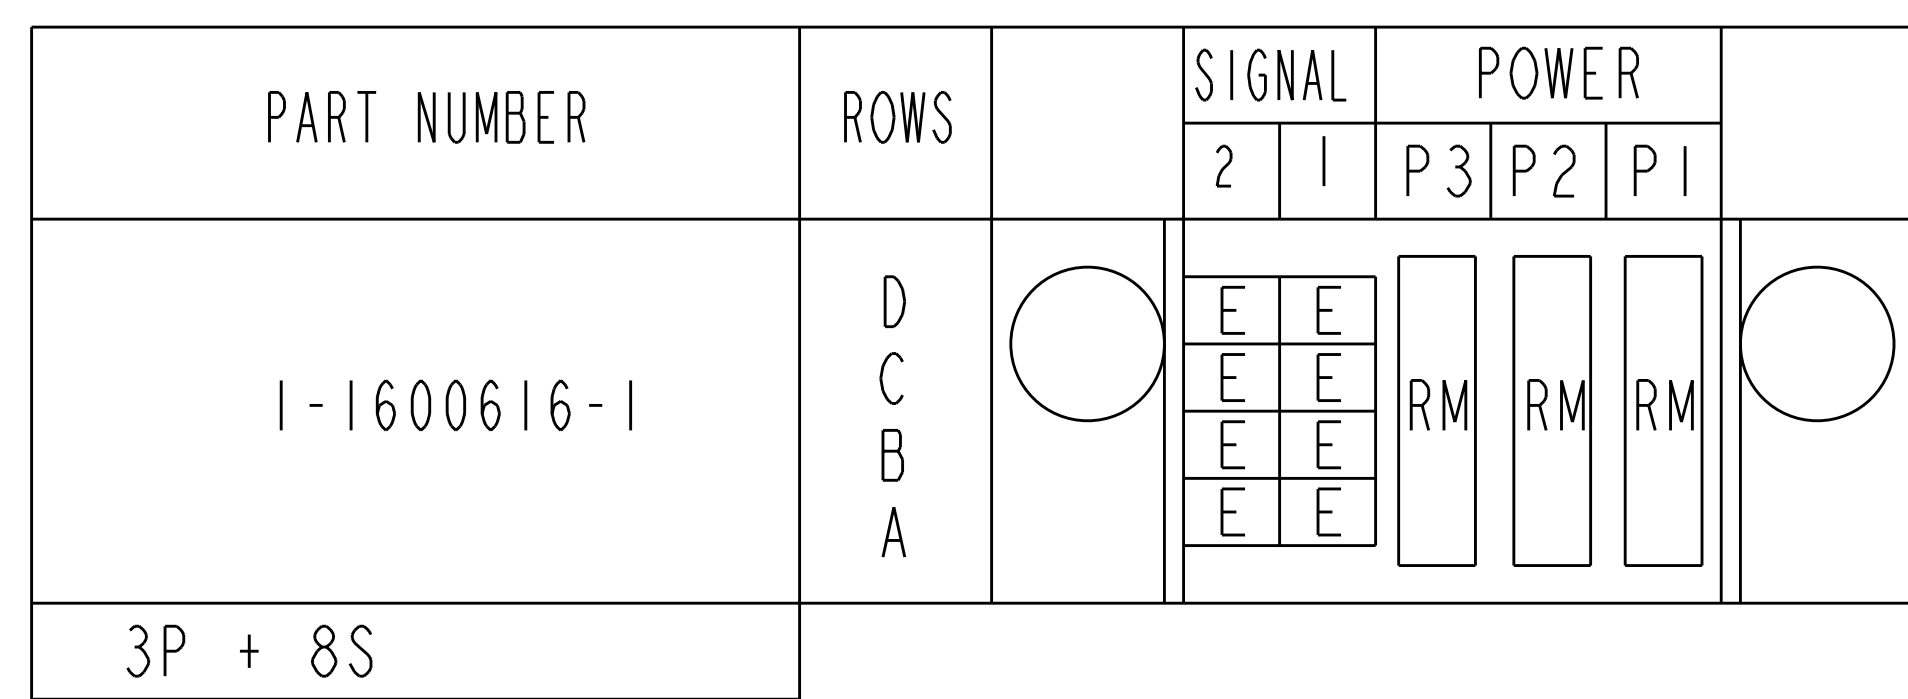

G5

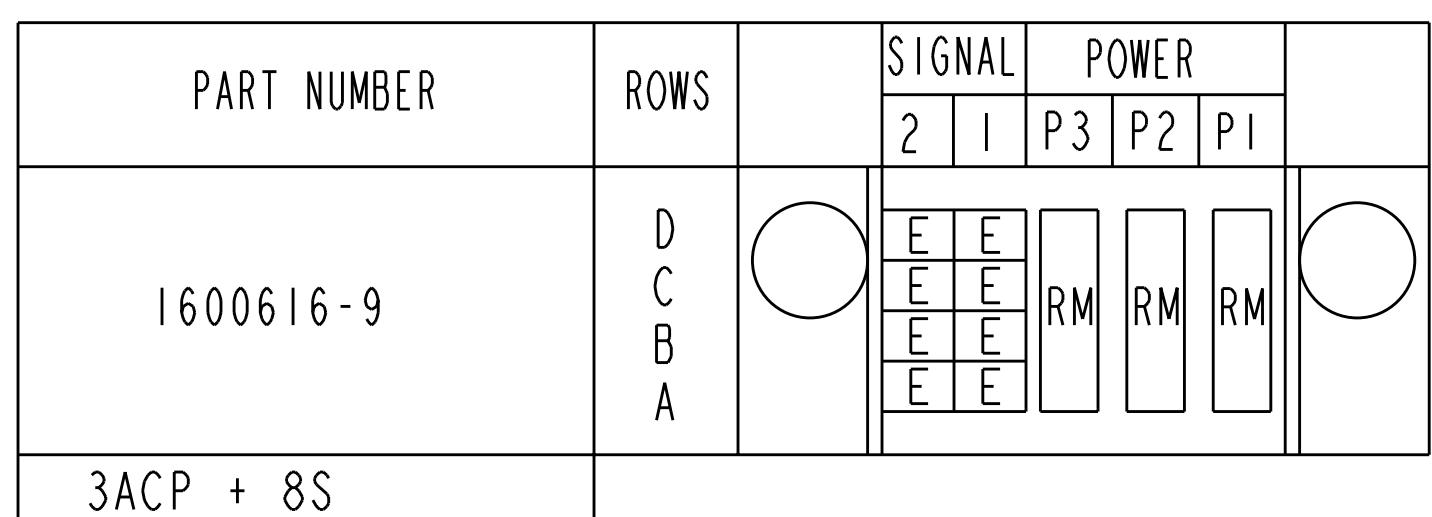

G6

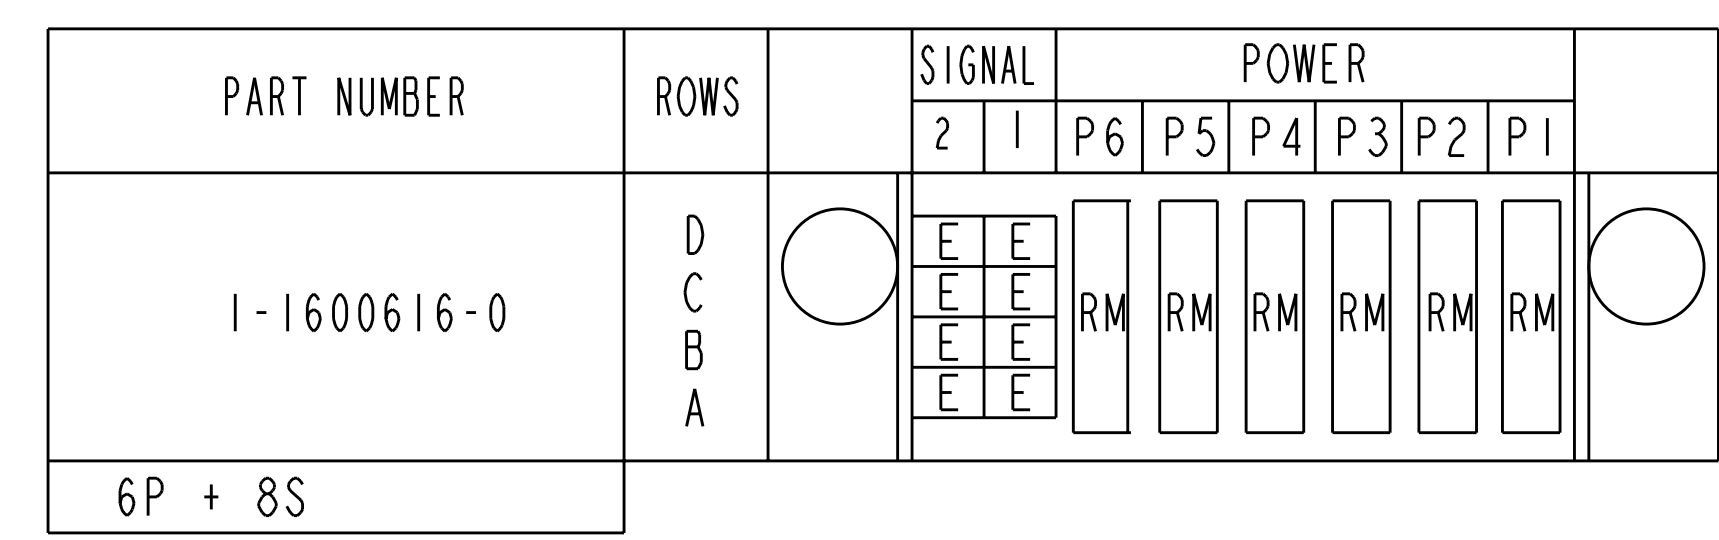

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: HAMMER 06 JUL 2004	TE Connectivity
DIMENSIONS: INCHES		CHK: D. TROUT 09 JUL 2004	
		APVD: D. TROUT	NAME: PLNEL MOUNT CABLE RECEPTACLE TYPE PS, WITH GUIDES MUTLI-BEAM XL
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC: 108-2157	RESTRICTED TO:
9 PLC ±.01		APPLICATION SPEC: 114-13112	SIZE: A100779
5 PLC ±.01		WEIGHT: -	CAGE CODE: C=1600616
4 PLC ±.0020		CUSTOMER DRAWING	SCALE: 4:1 SHEET 3 OF 3 REV: G7
ANGLES ±.0020			
FINISH: -			