




**Insulated Wire Ferrules  
DIN 46228 Part 4**

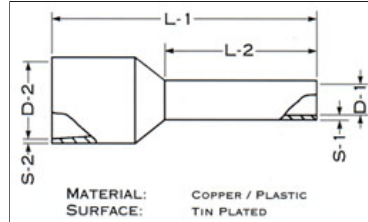

Size mm <sup>2</sup>	AWG	DIN		T		W		Pieces per bag	Dimensions (mm)						Recommended Crimping Tool
		Part Number	Color Code DIN	Part Number	Color Code T	Part Number	Color Code W		L-1	L-2	D-1	S-1	D-2	S-2	
0.14	<b>26-28</b>	1161014	GREY	1163014	BROWN	1162014	GREY	500	10.5	6	0.8	0.25	2	0.25	SQ28-10
		1181014		1183014		1182014		500	12.5	8	0.8	0.25	2	0.25	
0.25	<b>24-26</b>	11610025	YELLOW	11630025	VIOLET	11620025	BLUE	500	10.5	6	0.8	0.25	2	0.25	TRAP24-10 or SQ28-10
		11810025		11830025		11820025		500	12.5	8	0.8	0.25	2	0.25	
0.34	<b>22-24</b>	1161034	TURQ	1163034	PINK	1162034	TURQ	500	10.5	6	0.8	0.25	2	0.25	
		1181034		1183034		1182034		500	12.5	8	0.8	0.25	2	0.25	
0.5	<b>20-24</b>	1161050	WHITE	1163050	WHITE	1162050	ORANGE	500	11.5	6	1.1	0.15	2.5	0.25	
		1181050		1183050		1182050		500	13.5	8	1.1	0.15	2.5	0.25	
		11101050		11103050		11102050		500	15.5	10	1.1	0.15	2.5	0.25	
0.75	<b>20-22</b>	1161075	GREY	1163075	BLUE	1162075	WHITE	500	12	6	1.3	0.15	2.8	0.25	
		1181075		1183075		1182075		500	14	8	1.3	0.15	2.8	0.25	
		11101075		11103075		11102075		500	16	10	1.3	0.15	2.8	0.25	
		11121075		11123075		11122075		500	18	12	1.3	0.15	2.8	0.25	
1	<b>18</b>	1161010	RED	1163010	RED	1162010	YELLOW	500	12.5	6	1.5	0.15	3	0.3	
		1181010		1183010		1182010		500	14.5	8	1.5	0.15	3	0.3	
		11101010		11103010		11102010		500	16.5	10	1.5	0.15	3	0.3	
		11121010		11123010		11122010		500	18.5	12	1.5	0.15	3	0.3	
1.5	<b>16</b>	1161015	BLACK	1163015	BLACK	1162015	RED	500	12.5	6	1.8	0.15	3.4	0.3	
		1181015		1183015		1182015		500	14.5	8	1.8	0.15	3.4	0.3	
		11101015		11103015		11102015		500	16.5	10	1.8	0.15	3.4	0.3	
		11121015		11123015		11122015		500	18.5	12	1.8	0.15	3.4	0.3	
2.08	<b>14</b>	1181208	YELLOW	1183208	YELLOW	1182208	YELLOW	500	14.5	8	2.05	0.15	3.6	0.3	
		11121025		11123025		11122025		500	19	12	2.3	0.15	4.2	0.3	
		11181025		11183025		11182025		500	25	18	2.3	0.15	4.2	0.3	
		11101040		11103040		11102040		500	17.5	10	2.9	0.2	4.8	0.3	
4	<b>12</b>	11121040		11123040		11122040		500	20	12	2.9	0.2	4.8	0.3	
		11181040		11183040		11182040		100	26	18	2.9	0.2	4.8	0.3	
		11121060		11123060		11122060		100	20	12	3.6	0.2	6.2	0.3	
		11181060		11183060		11182060		100	25	18	3.6	0.2	6.2	0.3	
10	<b>8</b>	11121100	RED	11123100	BROWN	11122100	IVORY	100	21	12	4.6	0.2	7.5	0.3	TRAP8-1 or TRAP 8-4
		11181100		11183100		11182100		100	27	18	4.6	0.2	7.5	0.3	
16	<b>6</b>	11121160	BLUE	11123160	WHITE	11122160	GREEN	100	23	12	6	0.2	8.8	0.4	
		11181160		11183160		11182160		100	29	18	6	0.2	8.8	0.4	
25	<b>4</b>	11161250	YELLOW	11163250	BLACK	11162250	BROWN	50	29	16	7.5	0.2	11	0.5	
		11181250		11183250		11182250		50	31	18	7.5	0.2	11	0.5	
		11221250		11223250		11222250		50	35	22	7.5	0.2	11	0.5	
		11161350		11163350		11162350		50	30	16	8.5	0.2	12.5	0.5	
35	<b>2</b>	11181350		11183350		11182350		50	32	18	8.5	0.2	12.5	0.5	TRAP8-1
		11251350		11253350		11252350		50	39	25	8.5	0.2	12.5	0.5	
		11201500		11203500		11202500		50	36	20	10.5	0.35	15	0.6	
		11251500		11253500		11252500		25	41	25	10.5	0.35	15	0.6	
70	<b>1/0</b>	11201700	YELLOW	11203700	YELLOW	11202700	YELLOW	25	37	20	12.7	0.35	16	0.6	VICE70150
70	<b>2/0</b>	11271700	YELLOW	11273700	YELLOW	11272700	YELLOW	25	43	27	12.7	0.4	16	0.6	
95	<b>3/0</b>	11251950	RED	11253950	RED	11252950	RED	25	44	25	14.7	0.35	18	0.6	

120	<b>4/0</b>	112711200	BLUE	112731200	BLUE	112721200	BLUE	25	48	<b>27</b>	16.7	0.45	21	0.7
150	<b>300</b>													
150	<b>MCM</b>	113211500	YELLOW	113231500	YELLOW	113221500	YELLOW	25	58	<b>32</b>	19.5	0.5	23	1

---

©2005 American Electrical