

## Printed-circuit board connector - MSTB 2,5/10-G-5,08 AU - 1752836

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 12 A, Number of positions: 10, Pitch: 5.08 mm, Color: green, Contact surface: Gold, Mounting: Wave soldering



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	4.44 g
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### Dimensions

Pitch	5.08 mm
Dimension a	45.72 mm
Constructional height	9 mm
Length of the solder pin	3.5 mm

#### General

Range of articles	MSTB 2,5/..-G
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A
Color	green
Number of positions	10

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

# Printed-circuit board connector - MSTB 2,5/10-G-5,08 AU - 1752836

## Technical data

### Standards and Regulations

	CSA
--	-----

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

---

#### Approvals

CSA / VDE Gutachten mit Fertigungsüberwachung / IEC60947 CB Scheme / EAC / cULus Recognized / EAC

---

#### Ex Approvals

---

#### Approvals submitted

# Printed-circuit board connector - MSTB 2,5/10-G-5,08 AU - 1752836

## Approvals

### Approval details

CSA		
	B	D
Nominal current IN	15 A	10 A
Nominal voltage UN	300 V	300 V

VDE Gutachten mit Fertigungsüberwachung		
Nominal current IN	12 A	
Nominal voltage UN	250 V	

IECEE CB Scheme		
Nominal current IN	12 A	
Nominal voltage UN	250 V	

EAC
-----


cULus Recognized		
	B	D
Nominal current IN	15 A	15 A
Nominal voltage UN	300 V	150 V

EAC
-----

## Drawings

# Printed-circuit board connector - MSTB 2,5/10-G-5,08 AU - 1752836

Diagram

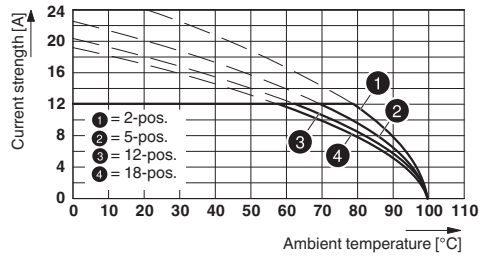

Type: MSTBT 2,5/...-ST-5,08 AU with MSTB 2,5/...-G-5,08 AU

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1752836](#)