

## Interface module - VIP-3/PT/PDM-2/24 - 2903798

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module with push-in connection and two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35 rails. Module width: 57.1 mm



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	160.6 g
Custom tariff number	85369010
Country of origin	United States

### Technical data

#### Dimensions

Width	57.1 mm
Height	75.5 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Nominal voltage $U_N$	250 V AC/DC
Max. current carrying capacity per branch	15 A
Total current	30 A (per potential)
Potential connections	Per potential (P1, P2) 2 power/12 distributor terminal blocks
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178

## Interface module - VIP-3/PT/PDM-2/24 - 2903798

### Technical data

#### General

	IEC 62103
Degree of pollution	2
Overvoltage category	III

#### Connection data, supply

Connection method	Push-in-/Spring-cage connection
Stripping length	15 mm
Conductor cross section solid	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section flexible	0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section AWG	24 ... 10
Number of connections	2

#### Connection data, distribution

Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14
Number of connections	24

#### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	III

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27242608
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

# Interface module - VIP-3/PT/PDM-2/24 - 2903798

## Classifications

### ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Approvals

### Approvals

---

#### Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

---


#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

CSA 	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	15 A
Nominal voltage U <sub>N</sub>	250 V

# Interface module - VIP-3/PT/PDM-2/24 - 2903798

## Approvals

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	15 A
Nominal voltage U <sub>N</sub>	250 V


cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	15 A
Nominal voltage U <sub>N</sub>	250 V

EAC


cULus Recognized

## Drawings

Circuit diagram



Dimensional drawing

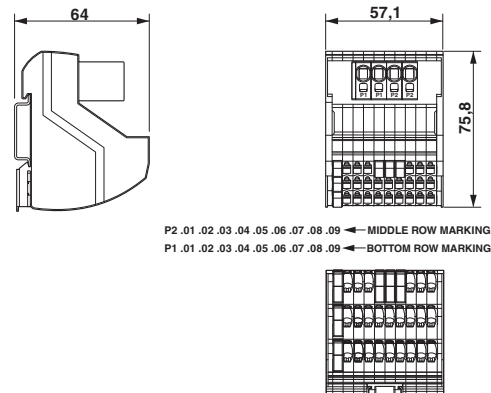



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2903798](#)