

Single relay - REL-SG 48/B104 - 2960012

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



KAMMRELAIS ®, contact B 104, size 1, low-level contact, 2 PDTs, input voltage 48 V DC

The illustration shows the version
REL-SG 12-24/B 104



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 086428
Weight per Piece (excluding packing)	24.75 g
Custom tariff number	85364190
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

Coil side

Nominal input voltage U_N	48 V DC
Input voltage range in reference to U_N	0.8 ... 1.1
Typical response time	5 ms
Typical release time	4 ms
Coil resistance	3200 Ω +15 %

Contact side

Contact type	Single contact
Contact material	Ag, gold-flashed

Single relay - REL-SG 48/B104 - 2960012

Technical data

Contact side

Maximum switching voltage	125 V AC
	150 V DC
Maximum inrush current	2 A
Limiting continuous current	2 A
Interrupting rating (ohmic load) max.	48 W (at 24 V DC)
	40 W (at 48 V DC)
	40 W (at 60 V DC)
	45 W (at 110 V DC)
	50 VA (for 125 V AC)

General

Test voltage relay winding/relay contact	500 V AC (50 Hz, 1 min.)
Test voltage PDT/PDT	500 V AC (50 Hz, 1 min.)
Mechanical service life	Approx. 10 ⁸ cycles

Classifications

eCl@ss

eCl@ss 4.0	27371104
eCl@ss 4.1	27371104
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371001
eCl@ss 7.0	27371001
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601

ETIM

ETIM 2.0	EC000196
ETIM 3.0	EC000196
ETIM 4.0	EC000196
ETIM 5.0	EC001437

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515

Single relay - REL-SG 48/B104 - 2960012

Classifications

UNSPSC

UNSPSC 13.2	39121515
-------------	----------

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC

Drawings

Single relay - REL-SG 48/B104 - 2960012

Circuit diagram

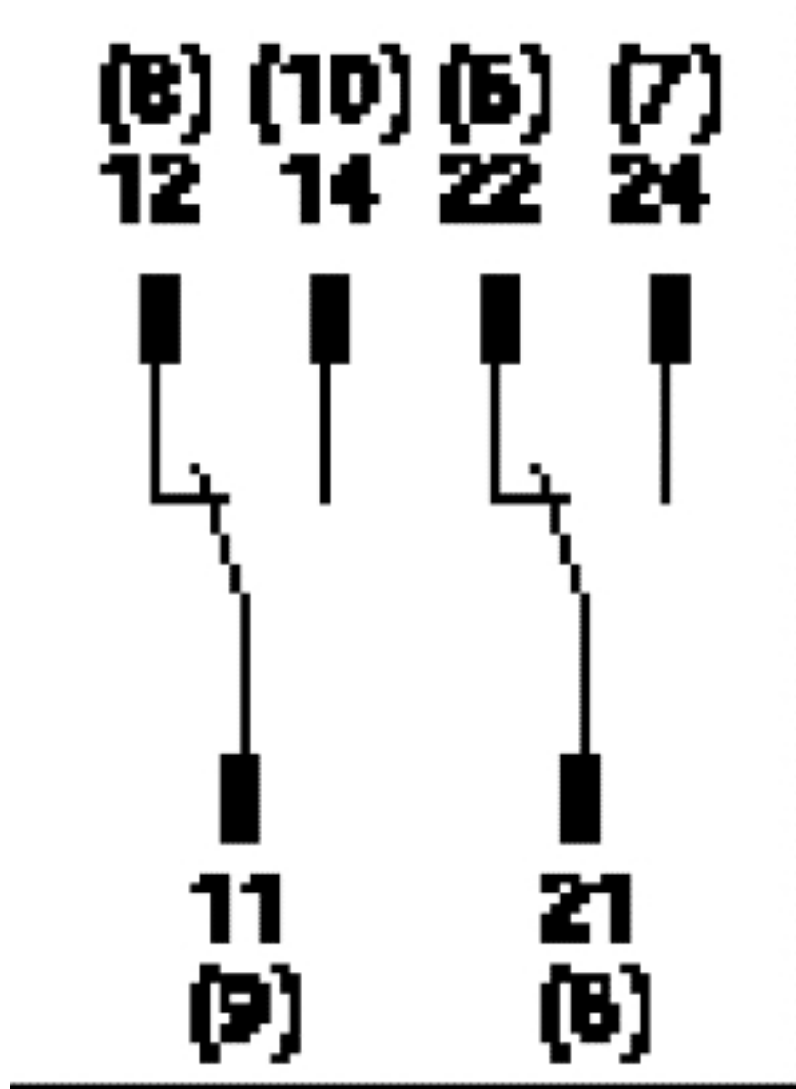

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2960012](#)