

ELR 1- 24DC/600AC-20

Order No.: 2297138



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2297138>

Single-phase solid-state contactor, input voltage: 24 V DC, output current: 20 A, zero voltage switch



Commercial data	
EAN	4046356132022
Pack	1 pcs.
Customs tariff	85371099
Weight/Piece	0.2572 KG
Catalog page information	Page 174 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
08/06/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data

Input voltage range	4 V DC ... 32 V DC
Typical input current at U_N	Approx. 12 mA
Switching threshold "0" signal, voltage	≤ 1 V DC
Switching threshold "1" signal voltage	≥ 4 V DC

Transmission frequency	25 Hz
Operating voltage display	LED green

Output data, load relay

Nominal output voltage range	42 V AC ... 660 V AC (45/65 Hz)
Periodic peak reverse voltage	1200 V
Mains frequency	45 Hz
	65 Hz
Load current	20 A (see derating curve)
Leakage current	< 3 mA (In off state)
Residual voltage	< 1.6 V
Surge current	250 A (t = 10 ms)
Max. load value	525 A ² s
Name of protection	RCV circuit
Protective circuit/component	RCV circuit

General data

Width	22.5 mm
Height	103 mm
Depth	103 mm
Test voltage input/output	4 kV _{rms}
Ambient temperature (operation)	-30 °C ... 70 °C
Ambient temperature (storage/transport)	-30 °C ... 70 °C
Mounting position	Vertical (horizontal DIN rail)
Assembly instructions	Can be aligned with ≥ 22.5 mm spacing
Name	Air and creepage distances between the power circuits
Standards/regulations	EN 61000-4-2
	EN 61000-4-3
	EN 61000-4-4
	EN 61000-4-5
	EN 61000-4-6
	EN 55011
Rated surge voltage / insulation	Basic insulation

Certificates / Approvals




Certification


CUL, UL

Drawings

Block diagram

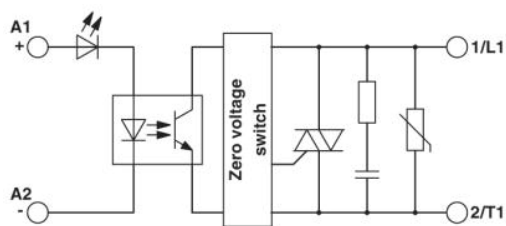

Diagram

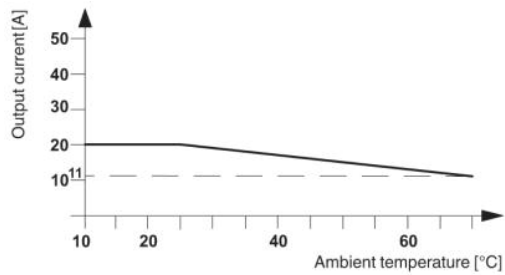

Address

PHOENIX CONTACT Ltd
Halesfield 13
Telford Shropshire TF7 4PG,GB
Phone 01952 681 700
Fax 01952 681 799
<http://www.phoenixcontact.co.uk>



© 2009 Phoenix Contact
Technical modifications reserved;