




Home > Products > MICRO SWITCH™ Toggle Switches > TL > Product Page

Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

2TL256-3D

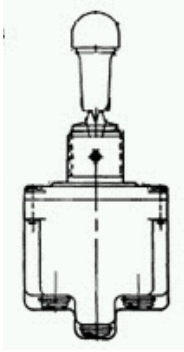

Actual product appearance may vary.

TL Series Toggle Switch, 2 pole, 2 position, Screw terminal, Locking Lever

Features

Environmentproof sealing
 1,2, and 4 pole circuitry
 Standard and pull-to-unlock levers
 2 and 3 position, maintained and momentary toggle action
 Temperature range: -85° F to +160° F
 Completely sealed switching chamber
 Step-design case provides added space between terminals to help prevent shorting
 UL recognized, CSA certified
 CE approved

Potential Applications

Industrial machinery and equipment
 Military and commercial aviation
 Construction equipment
 Test instruments
 Agricultural machinery
 Process control
 Medical instrumentation

Description

MICRO SWITCH™ TL Series toggle switches have high strength, temperature resistant, non-tracking case material and silver cadmium oxide contacts. Pull-to-unlock toggle levers prevent accidental operation; the lever must be pulled approx. 2,3 mm (0.09 inches) to change positions.

Supporting Documentation

[Accessory: Seals](#)

[Accessory: Nuts](#)

[Engineering Drawing](#)

Product Specifications													
Circuitry/Operating action	<table border="0" style="width: 100%; text-align: center;"> <tr> <td></td> <td>Keyway Position</td> <td>Opposite Keyway Position</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>ON</td> <td>ON</td> </tr> </table>		Keyway Position	Opposite Keyway Position								ON	ON
	Keyway Position	Opposite Keyway Position											
	ON	ON											
Product Type	MICRO SWITCH™ Toggle Switch												
Lever Lock	<p>Locked out of center position</p>												
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc, 0.5 A at 250 Vdc, 0.5 A to 15 A at 0.5 Vac to 277 Vac, 0.5 A to 20 A at 0.5 Vdc to 28 Vdc												
Circuitry	DPDT												
Action	2 position												
Mounting	Bushing 15/32 in												
Termination	Screw												
Lever Type	Locking												
Comment	High force leverlock spring												
Availability	Global												
UNSPSC Code	30211908												
UNSPSC Commodity	30211908 Toggle switches												
Series Name	TL												

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

[Specification Search](#)