


NOTES:
 1 .000030 GOLD ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .000050 NICKEL
 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

2	1,3,6,8,9	1,3,6,7,14	2.79 [.110]	55.47 [2.184]	53.34 [2.100]	21	44	-4-86479-9
	1,3,6,8,9	15,18,20,2	2.79 [.110]	93.57 [3.684]	91.44 [3.600]	36	74	-4-86479-6
OBSOLETE	1,9,15	3,11,17	2.79 [.110]	93.57 [3.684]	91.44 [3.600]	36	74	-4-86479-6
OBSOLETE	3	4	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	20	-4-86479-5
	NONE	NONE	2.79 [.110]	101.19 [3.984]	99.06 [3.900]	39	80	4-86479-4
	NONE	NONE	2.79 [.110]	98.65 [3.884]	96.52 [3.800]	38	78	4-86479-3
	NONE	NONE	2.79 [.110]	96.11 [3.784]	93.98 [3.700]	37	76	4-86479-2
	NONE	NONE	2.79 [.110]	93.57 [3.684]	91.44 [3.600]	36	74	4-86479-1
	NONE	NONE	2.79 [.110]	91.03 [3.584]	88.90 [3.500]	35	72	4-86479-0
	NONE	NONE	2.79 [.110]	88.49 [3.484]	86.36 [3.400]	34	70	3-86479-9
	NONE	NONE	2.79 [.110]	85.95 [3.384]	83.82 [3.300]	33	68	3-86479-8
	NONE	NONE	2.79 [.110]	83.41 [3.284]	81.28 [3.200]	32	66	3-86479-7
	NONE	NONE	2.79 [.110]	80.87 [3.184]	78.74 [3.100]	31	64	3-86479-6
	NONE	NONE	2.79 [.110]	78.33 [3.084]	76.20 [3.000]	30	62	3-86479-5
	NONE	NONE	2.79 [.110]	75.79 [2.984]	73.66 [2.900]	29	60	3-86479-4
	NONE	NONE	2.79 [.110]	73.25 [2.884]	71.12 [2.800]	28	58	3-86479-3
	NONE	NONE	2.79 [.110]	70.71 [2.784]	68.58 [2.700]	27	56	3-86479-2
	NONE	NONE	2.79 [.110]	68.17 [2.684]	66.04 [2.600]	26	54	3-86479-1
	NONE	NONE	2.79 [.110]	65.63 [2.584]	63.50 [2.500]	25	52	3-86479-0
	NONE	NONE	2.79 [.110]	63.09 [2.484]	60.96 [2.400]	24	50	2-86479-9
	NONE	NONE	2.79 [.110]	60.55 [2.384]	58.42 [2.300]	23	48	2-86479-8
	NONE	NONE	2.79 [.110]	58.01 [2.284]	55.88 [2.200]	22	46	2-86479-7
	NONE	NONE	2.79 [.110]	55.47 [2.184]	53.34 [2.100]	21	44	2-86479-6
	NONE	NONE	2.79 [.110]	52.93 [2.084]	50.80 [2.000]	20	42	2-86479-5
	NONE	NONE	2.79 [.110]	50.39 [1.984]	48.26 [1.900]	19	40	2-86479-4
	NONE	NONE	2.79 [.110]	47.85 [1.884]	45.72 [1.800]	18	38	2-86479-3
	NONE	NONE	2.79 [.110]	45.31 [1.784]	43.18 [1.700]	17	36	2-86479-2
	NONE	NONE	2.79 [.110]	42.77 [1.684]	40.64 [1.600]	16	34	2-86479-1
	NONE	NONE	2.79 [.110]	40.23 [1.584]	38.10 [1.500]	15	32	2-86479-0
	NONE	NONE	2.79 [.110]	37.69 [1.484]	35.56 [1.400]	14	30	1-86479-9
	NONE	NONE	2.79 [.110]	35.15 [1.384]	33.02 [1.300]	13	28	1-86479-8
	NONE	NONE	2.79 [.110]	32.61 [1.284]	30.48 [1.200]	12	26	1-86479-7
	NONE	NONE	2.79 [.110]	30.07 [1.184]	27.94 [1.100]	11	24	86479-6
	NONE	NONE	2.79 [.110]	27.43 [1.084]	25.40 [1.000]	10	22	86479-5
	NONE	NONE	2.79 [.110]	24.89 [0.984]	22.86 [0.900]	9	20	86479-4
	NONE	NONE	2.79 [.110]	22.35 [0.884]	20.32 [0.800]	8	18	86479-3
	NONE	NONE	2.79 [.110]	19.81 [0.784]	17.78 [0.700]	7	16	86479-2
	NONE	NONE	2.79 [.110]	17.27 [0.684]	15.24 [0.600]	6	14	86479-1
	NONE	NONE	2.79 [.110]	14.73 [0.584]	12.70 [0.500]	5	12	86479-0
	NONE	NONE	2.79 [.110]	12.19 [0.484]	10.16 [0.400]	4	10	86479-9
	NONE	NONE	2.79 [.110]	9.65 [0.384]	7.62 [0.300]	3	8	86479-8
	NONE	NONE	2.79 [.110]	7.11 [0.284]	5.08 [0.200]	2	6	86479-7
	NONE	NONE	2.79 [.110]	4.57 [0.184]	2.54 [0.100]	1	4	86479-6
	NONE	NONE	2.79 [.110]	2.03 [0.084]	0.00 [0.000]	0	2	86479-5
OBSOLETE	NONE	NONE	2.79 [.110]	-	-	-	-	86479-4
OBSOLETE	NONE	NONE	2.79 [.110]	-	-	-	-	86479-3
	NONE	6	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	19	86479-2
	NONE	NONE	2.79 [.110]	32.61 [1.284]	30.48 [1.200]	12	26	86479-1
SUPERSEDED BY 4-87230-2	NONE	NONE	2.79 [.110]	-	-	-	-	86479-0
SUPERSEDED BY 4-87230-1	NONE	NONE	2.79 [.110]	-	-	-	-	86479-9
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-8
	NONE	NONE	2.79 [.110]	30.07 [1.184]	27.94 [1.100]	11	24	86479-7
	NONE	NONE	2.79 [.110]	22.45 [.884]	20.32 [.800]	8	18	86479-6
	NONE	NONE	2.79 [.110]	17.37 [.684]	15.24 [.600]	6	14	86479-5
	NONE	NONE	2.79 [.110]	14.83 [.584]	12.70 [.500]	5	12	86479-4
	NONE	NONE	2.79 [.110]	12.29 [.484]	10.16 [.400]	4	10	86479-3
	NONE	NONE	2.79 [.110]	19.91 [.784]	17.78 [.700]	7	16	86479-2
	NONE	NONE	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	20	86479-1
	ROW E	ROW D	Z	C	B	A	NO OF POSN	PART NUMBER
	POSTS OMITTED							

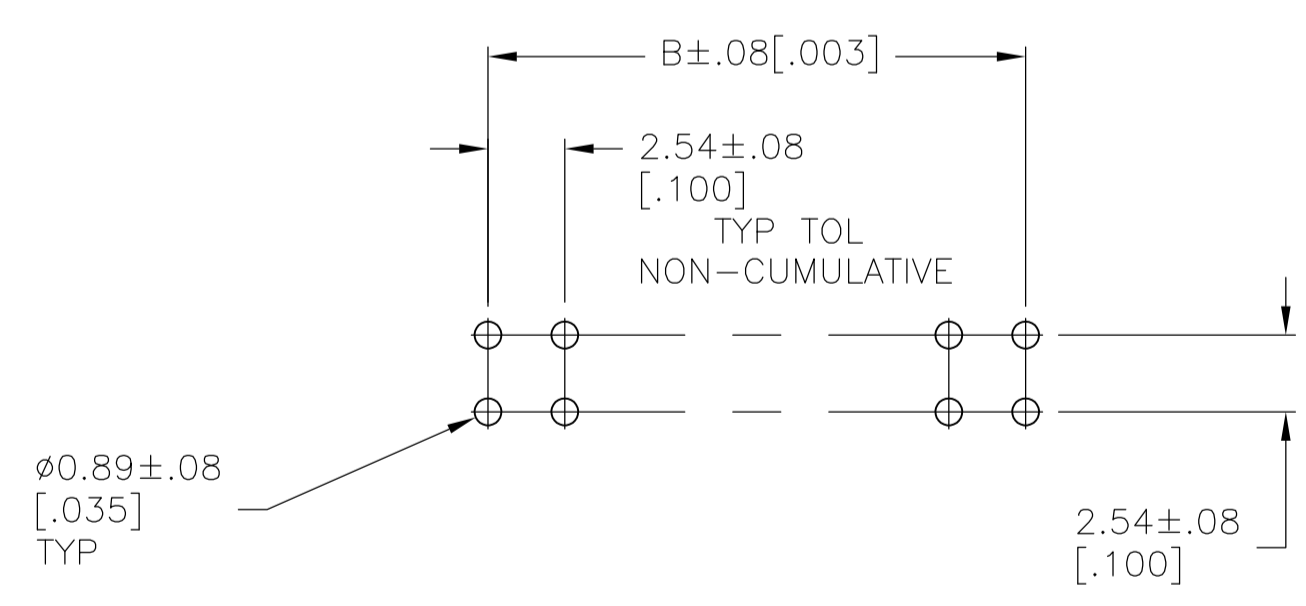

RECOMMENDED BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED: J. KNAUB 16MAY94, J. KNITTLE 17MAY94

TE Connectivity

ASSEMBLY, MOD II, DOUBLE ROW .100 X .100 CL, RIGHT ANGLE WITH SPANKED TAILS

SIZE: A1, CASE CODE: 00779, DRAWING NO: 86479

SCALE: 4:1, SHEET: 1 of 1, REV: S3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-86479-4](#)