

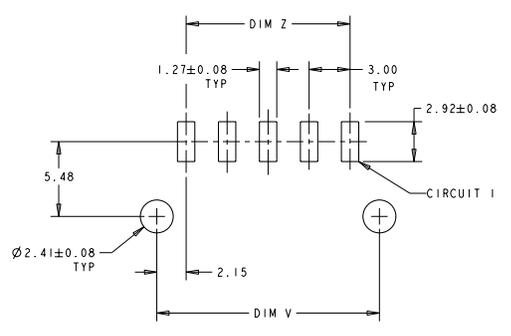



REV	DATE	BY	APP'D	DESCRIPTION
CI	17MAR2011	JK	HMR	REVISED PER ECO-11-005027



PCB LAYOUT COMPONENT SIDE

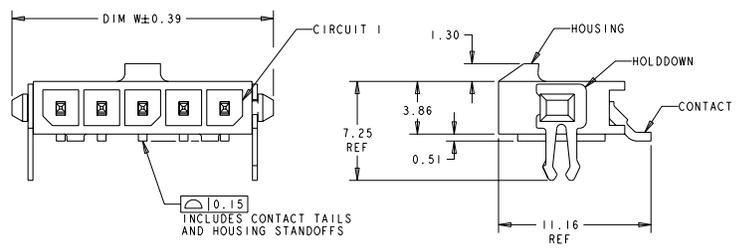

- ⚠ MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.
- ⚠ PLATING: CONTACTS - 2.54µm MINIMUM TIN LEAD OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM TIN-LEAD OVER 1.27µm MINIMUM NICKEL.
- ⚠ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ⚠ PLATING: CONTACTS - 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.

FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER
5	33.00	37.43	40.00	12	3-1445056-2
5	30.00	34.43	37.00	11	3-1445056-1
5	27.00	31.43	34.00	10	3-1445056-0
5	24.00	28.43	31.00	9	2-1445056-9
5	21.00	25.43	28.00	8	2-1445056-8
5	18.00	22.43	25.00	7	2-1445056-7
5	15.00	19.43	22.00	6	2-1445056-6
5	12.00	16.43	19.00	5	2-1445056-5
5	9.00	13.43	16.00	4	2-1445056-4
5	6.00	10.43	13.00	3	2-1445056-3
5	3.00	7.43	10.00	2	2-1445056-2
2	33.00	37.43	40.00	12	1-1445056-2
2	30.00	34.43	37.00	11	1-1445056-1
2	27.00	31.43	34.00	10	1-1445056-0
2	24.00	28.43	31.00	9	1445056-9
2	21.00	25.43	28.00	8	1445056-8
2	18.00	22.43	25.00	7	1445056-7
2	15.00	19.43	22.00	6	1445056-6
2	12.00	16.43	19.00	5	1445056-5
2	9.00	13.43	16.00	4	1445056-4
2	6.00	10.43	13.00	3	1445056-3
2	3.00	7.43	10.00	2	1445056-2

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG NO. 030CT2000
 DATE 13-MAR-2001
 DESIGNED BY R. MILLIKEN
 APPROVED BY R. MILLIKEN
 NAME R. MILLIKEN
 PRODUCT SPEC
 APPLICATION SPEC
 WEIGHT
 FINISH
 SEE TABLE
 CUSTOMER DRAWING
 SCALE 5:1
 SHEET 1 OF 1
 REV C I

TE Connectivity
 RT ANGLE SURFACE MOUNT HEADER ASSY.
 TIN CONTACTS W/THRU HOLE HOLDDOWNS,
 SINGLE ROW, MICRO MATE-N-LOK™

SHEET CODE 200779
 DRAWING NO. 1445056
 RESTRICTED TO