
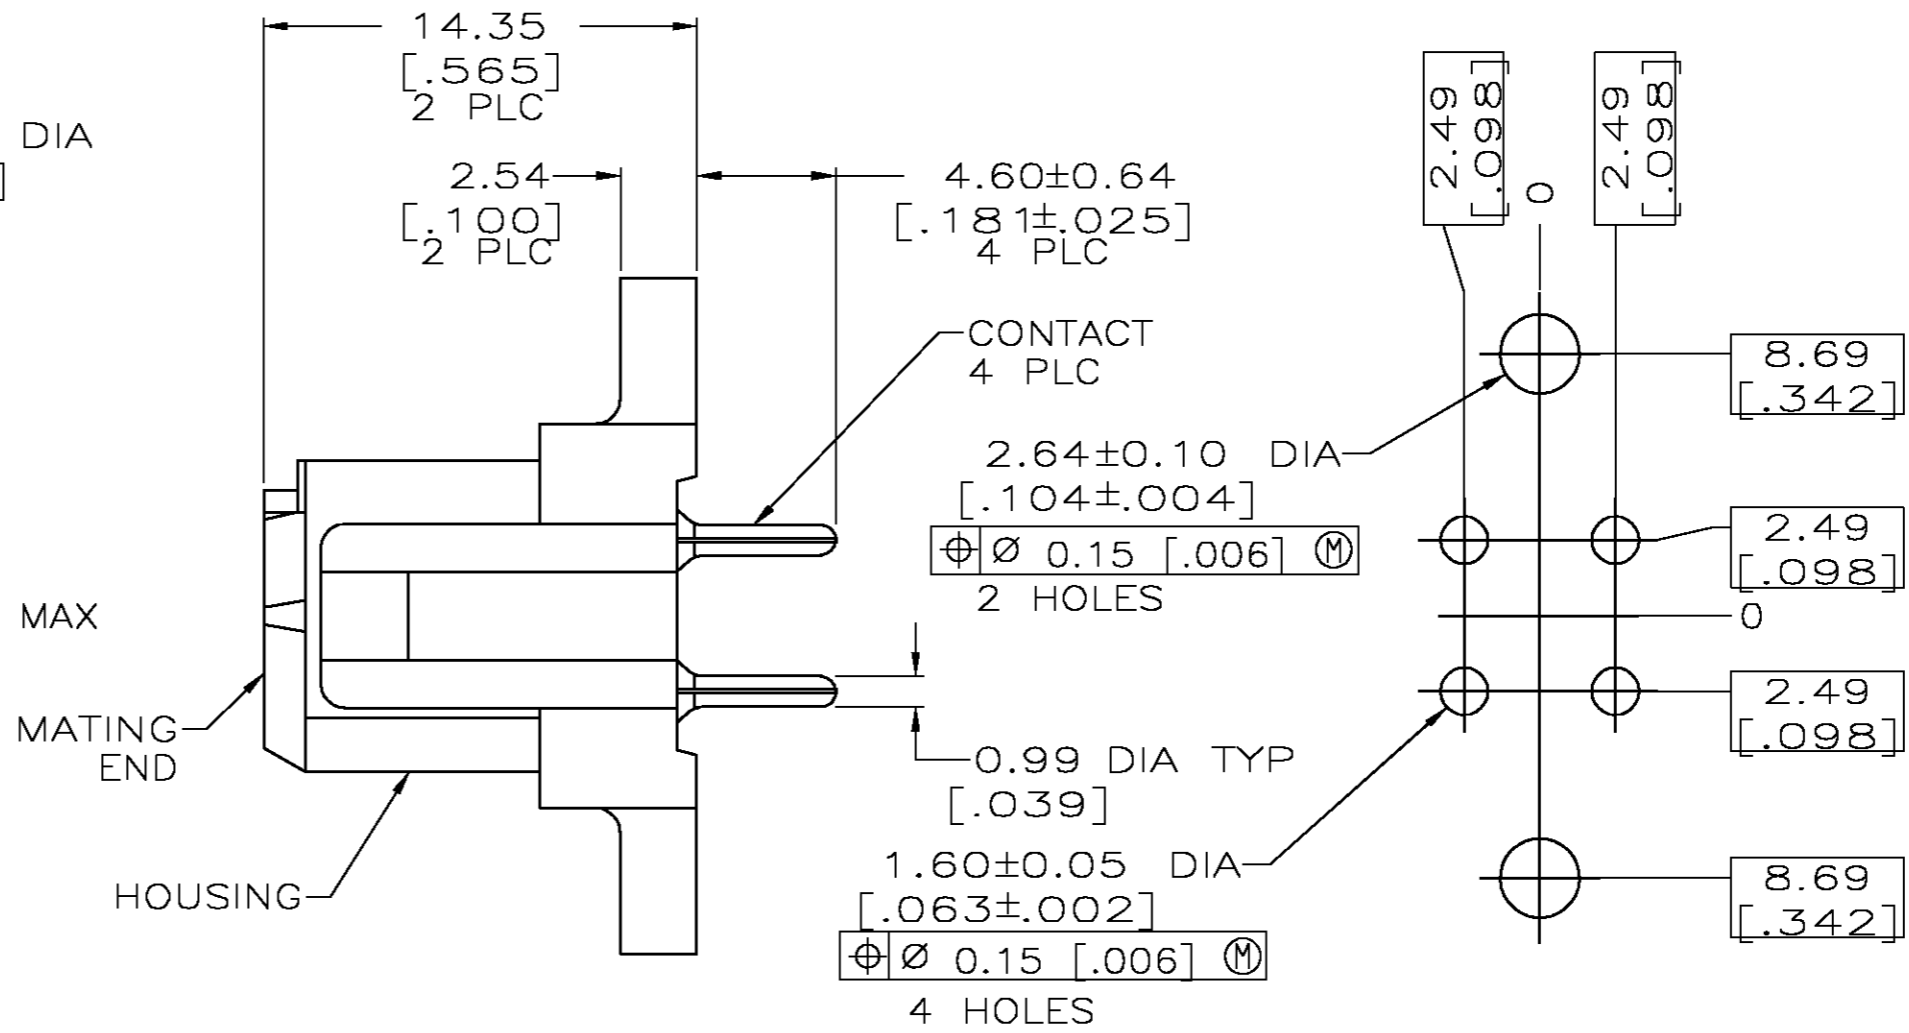


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
FT	0	L	REVISED PER	0G3B-0170-05	4/11/05	SS	GS

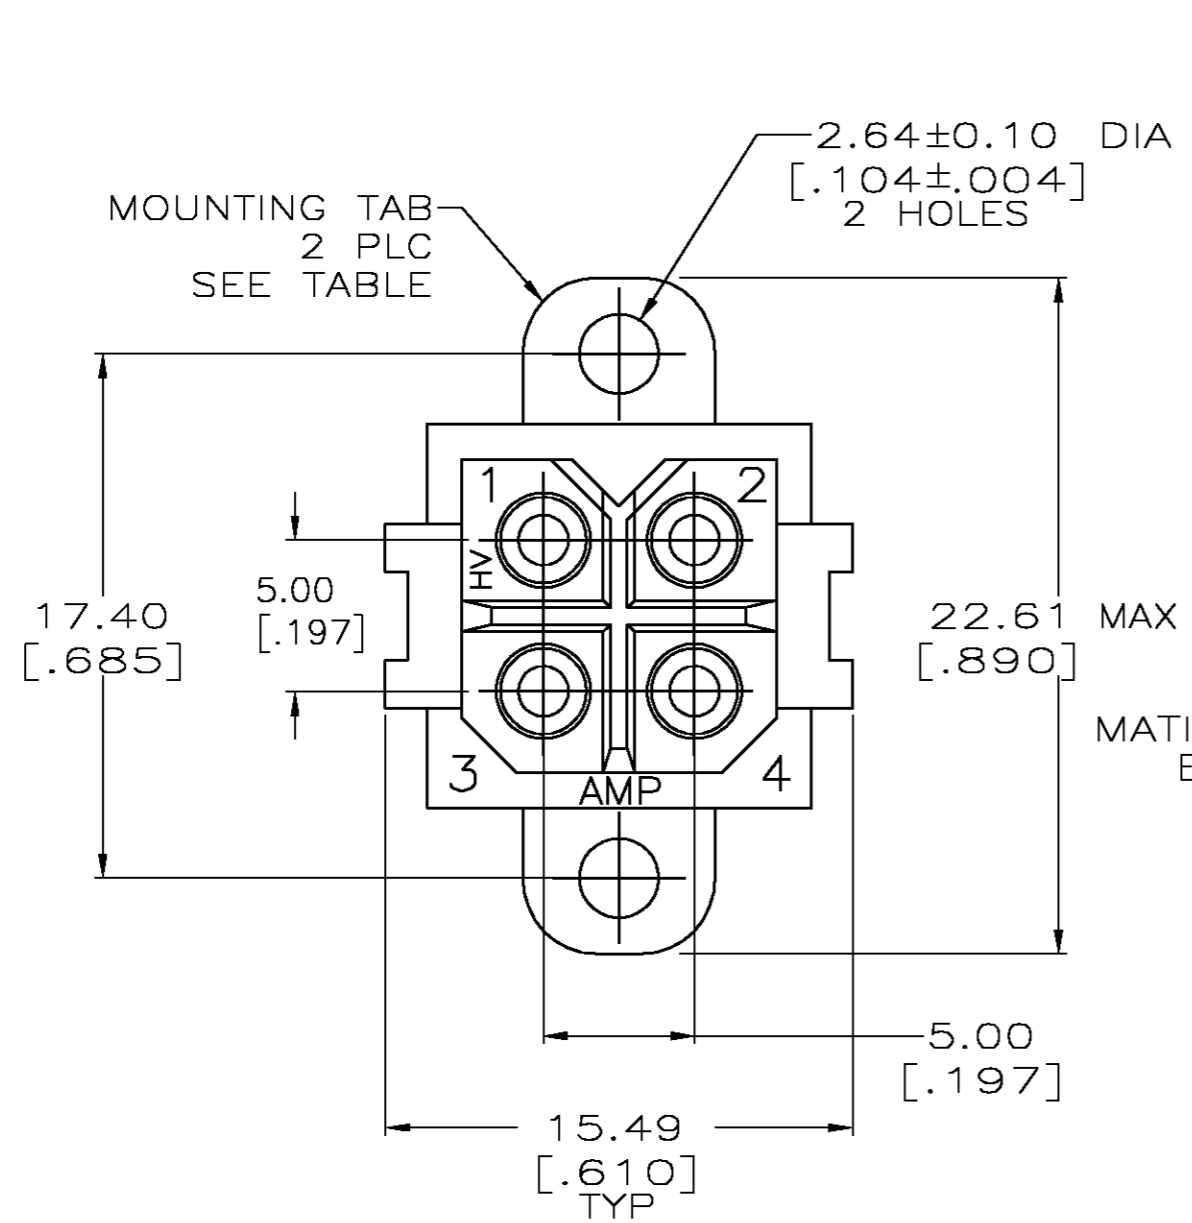

- ① NYLON, UL 94-VO RATED, RED.
- ② PHOSPHOR BRONZE.
- ③ 3.81um [.000150] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- ④ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- ⑤ 3.81um [.000150] MIN TIN OVER 1.27um [.000050] MIN NICKEL.
- ⑥ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

RECOMMENDED LAYOUT

CONTACT FINISH	MOUNTING TABS	PART NUMBER
6	NO	1-207496-0
6	YES	207496-9
5	NO	207496-8
5	YES	207496-7
4	NO	207496-4
4	YES	207496-3
3	NO	207496-2
3	YES	207496-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	L.SIPE	03/17/92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
CHK	R.STONE	3-25-92	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-10033 APPLICATION SPEC	SOCKET HEADER ASSEMBLY, 4 POSN, METRIMATE
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
HOUSING: 1	CONTACT: SEE TABLE	-	-
CUSTOMER DRAWING		SCALE	SHEET
		4:1	1 OF 1