



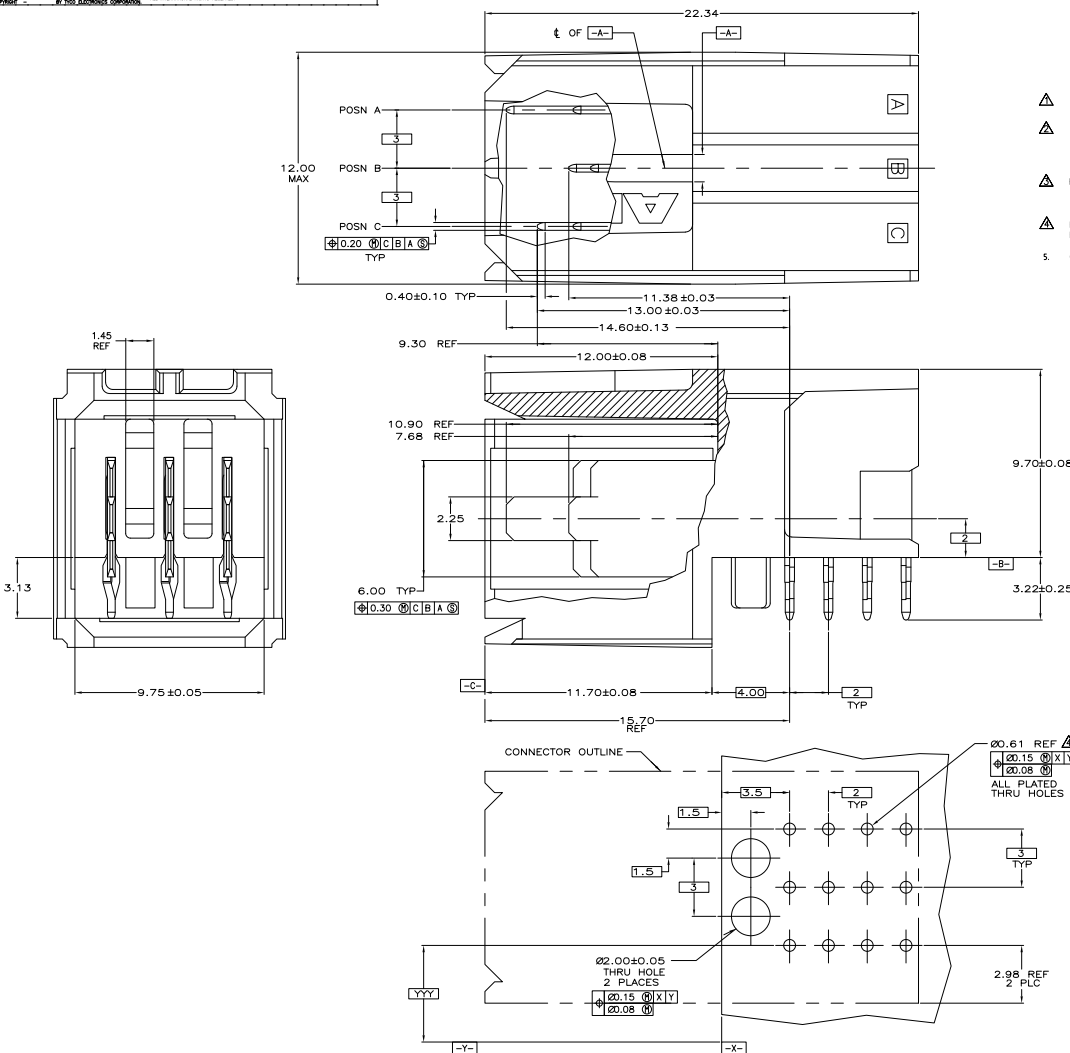

- ⚠ MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. UL 94V-0.  
CONTACT: PHOSPHOR BRONZE.
- FINISH: CONTACT MATING AREA: 1.27mm MIN GOLD OR 0.89mm MIN GOLD OVER  
0.76mm MIN PALLADIUM-NICKEL.  
ACTION PIN AREA: 0.51mm MIN TIN LEAD PLATE,  
ALL OVER 1.27mm MIN NICKEL UNDERPLATE.
- FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED  
LUBRICANT. TECHNICAL REFERENCES: TR-NWT-001217  
ISSUE 1, SEPT 1992.
- ⚠ REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU  
HOLE DIAMETER AND PLATING THICKNESSES.
5. CURRENT RATING 10A/CURRENT PER PRODUCT SPEC 108-1651.

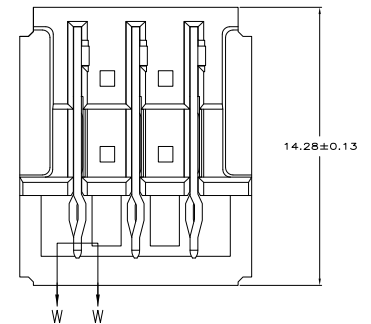

0.42 REF

⊕ 0.20 ⊗ C B A ⊗

TYP

SECTION W-W  
SCALE 40:1

|             |
|-------------|
| 223971-1    |
| PART NUMBER |

|                                        |  |                  |  |                              |  |                           |  |                           |  |                                                                                |  |
|----------------------------------------|--|------------------|--|------------------------------|--|---------------------------|--|---------------------------|--|--------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  |                  |  | DESIGNED BY<br>J. A. LOCONDO |  | DRAWN BY<br>J. A. LOCONDO |  | TYPED BY<br>J. A. LOCONDO |  | Title<br>Typo Electronics Corporation<br>Haverhill, MA 01709-3628              |  |
| DIMENSIONS<br>PER                      |  | OTHER NOTES: SEE |  | CHECKED BY<br>B. A. PATTISON |  | DATE<br>10/1/80           |  | SCALE<br>1:1              |  | USE<br>ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PINS, UNIVERSAL POWER MODULE |  |
|                                        |  |                  |  |                              |  |                           |  |                           |  |                                                                                |  |