

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

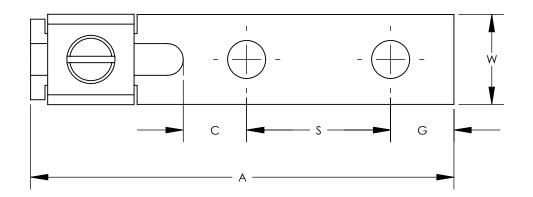

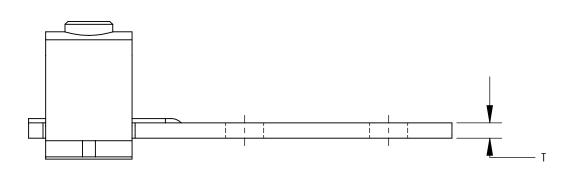

PANDUIT	WIRE RANGE COPPER	CURRENT RATING (AMPS)	STUD SIZE IN		HEX					
PART NUMBER				А	W	G	S	С	Т	SIZE*
CD35-36SL-QY	#14 - #6 (1) #10 & (1) #12 (1) #12 & (1) #14 (2) #10 (2) #12 (2) #14	50	3/16	2.13 [54.1]	.38 [9.7]	.22 [5.6]	1.00 [25.4]	.38 [9.7]	.07 [1.8]	SLOTTED
CD70-14SL-QY	#8 - #2	90	1/4	2.26 [57.4]	.50 [12.7]	.25 [6.4]	1.00 [25.4]	.38 [9.7]	.08 [2.0]	SLOTTED
CD125-14SL-QY	#2 - #1/0	125	1/4	2.94 [74.7]	.62 [15.7]	.44 [11.2]	1.00 [25.4]	.44 [11.2]	.11 [2.8]	SLOTTED
CD225-56HK-QY	#2 - #4/0	225	5/16	3.38 [85.9]	.99 [25.1]	.50 [12.7]	1.00 [25.4]	.63 [16.0]	.12 [3.0]	3/16
CD300-38HK-3Y	#1 - 350	300	3/8	4.94 [125.5]	.99 [25.1]	.94 [23.9]	1.00 [25.4]	1.38 [35.1]	.12 [3.0]	5/16
CD400-38HK-3Y	#1/0 - 500	400	3/8	5.62 [142.7]	1.50 [38.1]	.94 [23.9]	1.75 [44.5]	.88 [22.4]	.18 [4.6]	5/16
CD650-12HK-3Y	600 - 1000	650	1/2	6.88 [174.8]		1.19 [30.2]	1.75 [44.5]	1.75 [44.5]	.25 [6.4]	3/8

*HEX STYLE & SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART

NOTES:

- 1. MATERIAL: BODY - COPPER SCREW - STEEL, ZINC PLATED
- 2. cULus LISTEDFOR USE UP TO 600V & TEMPERATURE RATED 90°C
- 3. RATED FOR USE WITH COPPER STRANDED CODE CONDUCTOR ONLY
- 4. THESE PARTS ARE ROHS COMPLIANT
- 5. SEE PACKAGING LABEL FOR TIGHTENING TORQUE INFORMATION
- 6. PKG QTY: Q = 25 3 = 3



								PANDUIT COR	P. TINLEY PARK, ILLINOIS
03	4/13	JHNU	JHNU	REVISED WIRE RANGE FOR CD225-56HK-QY: 2-4/0 WAS 6-4/0 REVISED WIRE RANGE FOR CD70-14SL-QY: 8-2 WAS 12-2	N41666BA-C41666	RGB	RGB	CD SERIES COPPER MECHA CUSTOMER D	
02	2/12	JHNU	JHNU	REVISED "W" DIMENSION: CD35 WAS .37, CD70 WAS .47, CD650 WAS 1.97 REVISED "T" DIMENSION: CD650 WAS .22 REVISED PART NUMBERS: ADDED "SL" SUFFIX TO CD35, CD70, CD125 ADDED "HK" SUFFIX TO CD225, CD300, CD400, CD650	N41666BA-C41666	RGB	RGB	UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION
01	1/07	JHNU	JHNU	ADDED PART WEIGHT COLUMN TO TABLE	PC00640			DRAWN BY MAT'L:	SCALE NONE
00	3/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00348			DATE	DRAWING NO / CAD FILE DWG
RE	/ DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	СНК'D	C41666_03 SIZE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

<u>CD225-56HK-QY</u> <u>CD650-12HK-3Y</u> <u>CD125-14SL-QY</u> <u>CD400-38HK-3Y</u> <u>CD70-14SL-QY</u> <u>CD300-38HK-3Y</u> <u>CD35-36SL-QY</u>