

Silicon PNP Power Transistors

2SA1788

DESCRIPTION


- With TO-247 package
- Complement to type 2SC4652

APPLICATIONS

- For audio output applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

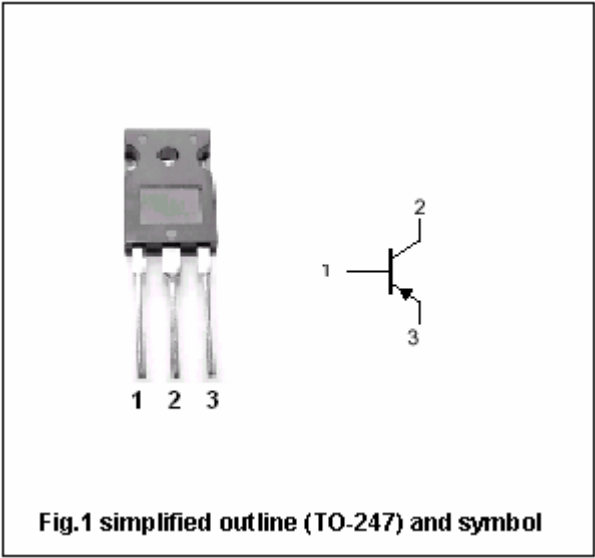

Absolute maximum ratings($T_c=25\text{ }^{\circ}\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-120	V
V_{CEO}	Collector-emitter voltage	Open base	-120	V
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-8	A
P_C	Collector power dissipation	$T_c=25$	80	W
T_j	Junction temperature		150	
T_{stg}	Storage temperature		-55~150	

Silicon PNP Power Transistors

2SA1788

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-25mA; I _B =0	-120			V
V _{(BR)CBO}	Collector-base breakdown voltage	I _C =-1mA; I _E =0	-120			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =-1mA; I _C =0	-5			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-6A; I _B =-0.6 A			-2.0	V
V _{BEsat}	Base-emitter saturation voltage	I _C =-6A; I _B =-0.6 A			-2.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-120V; I _E =0			-10	μ A
I _{EBO}	Emitter cut-off current	V _{EB} =-5V; I _C =0			-10	μ A
h _{FE}	DC current gain	I _C =-1A ; V _{CE} =-5V	60		320	

◆ h_{FE} classifications

D	E	F
60-120	100-200	160-320

Silicon PNP Power Transistors

2SA1788

PACKAGE OUTLINE

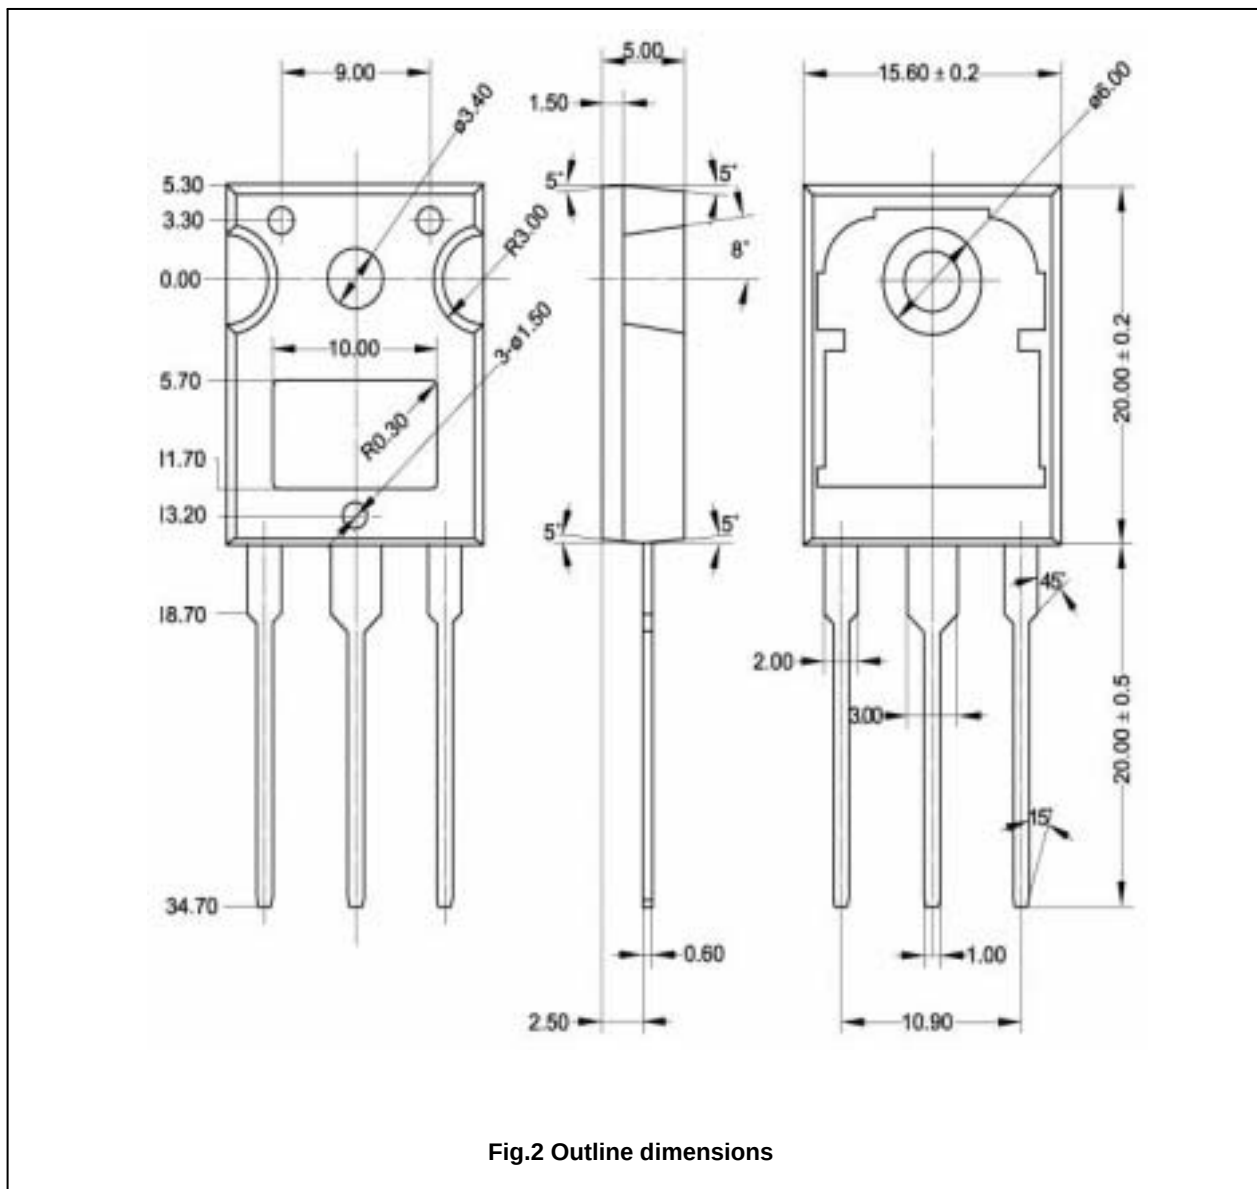


Fig.2 Outline dimensions