

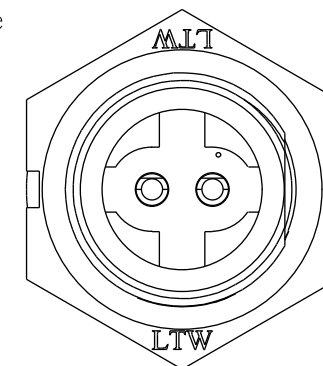
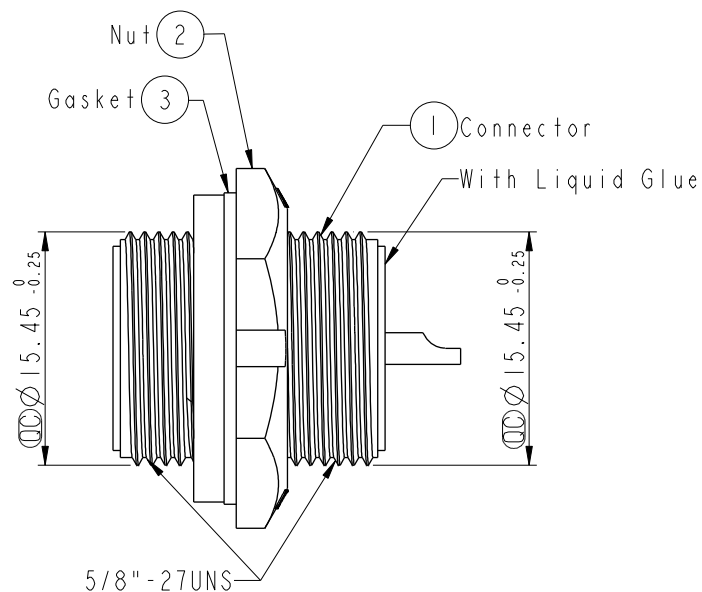



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0569	2008/09/10	Shin	Add Note

ALTW
CONFIDENTIAL
2012-03-15
R&D DEPT.


ALTW
DCC. DEPT.
CONFIDENTIAL
2012-03-26
ISSUED

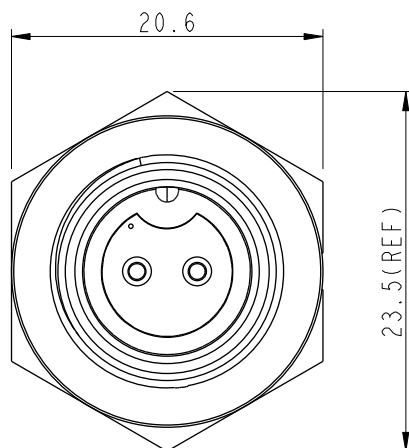

Pin Assignments
Front View



Recommended Panel Cut-out

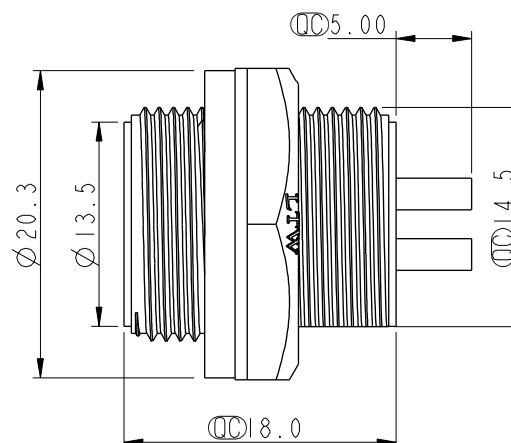

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Nylon+GF, Black
- * Gasket: EPDM, Black

- $\triangle B$ * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm
- $\triangle B$ * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 5.0mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO.	DRAWN BY	DATE
.X ±0.25		.XX ±0.1		Standard, Rear Screw 2P M Conn F Pin		BD-02RMFS-SC7001	SamChang	2012-03-15
.XXX ±0.05		ANGLES ±1°		SCALE 2:1	SIZE A4	DWG NO. BD-02RMFS-SC7001	CHECKED BY Jeffrey	DATE 2012-03-26
REV. B		WC-REV. A.2		SHEET 1 OF 1		CUSTOMER ALTW		DATE 2012-03-26
				QC: Inspection item		APPROVED BY Kevin		DATE 2012-03-26

Amphenol LTW
安費諾亮泰企業股份有限公司